


Onduline Technical Drawings


Index (Vertical Detail)


Roof Barge Detail (37mm)	1
Roof Barge Detail (24mm)	2
External Corner Detail (37mm)	3
External Corner Detail (24mm)	4
Internal Corner Detail (37mm)	5
Internal Corner Detail (24mm)	6
Eaves Detail (37mm)	7
Eaves Detail (24mm)	8
Window Head, Jamb & Sill Detail (37mm)	9
Window Head, Jamb & Sill Detail (24mm)	10
Sheet Join Details (37mm)	11
Sheet Join Details (24mm)	12
Enclosed Balustrade Cross Section (37 mm)	13
Enclosed Balustrade Cross Section (24 mm)	14
Base of Wall Detail (37mm)	15
Base of Wall Detail (24mm)	16
Floor / Balcony Junction Detail (37mm)	17
Floor / Balcony Junction Detail (24mm)	18
Balustrade Wall Detail (37 mm)	19
Balustrade Wall Detail (24 mm)	20
Meter Box Detail (37 mm)	21
Meter Box Detail (24 mm)	22

©2004 The copyright of this document is the property of C.V.Marketing Ltd and should not be reproduced, copied, loaned or disposed of directly or indirectly, nor used for any other purpose than that for which it is specifically furnished without prior written consent.


Disclaimer: Whilst every endeavour has been made in conjunction with relevant authorities to ensure the correctness of the detail, C.V.Marketing Ltd will not be responsible for any errors or omissions. Anyone using or relying on the detail must take appropriate architectural or other professional advice to ensure that Onduline is suitable for and used correctly in their particular project.

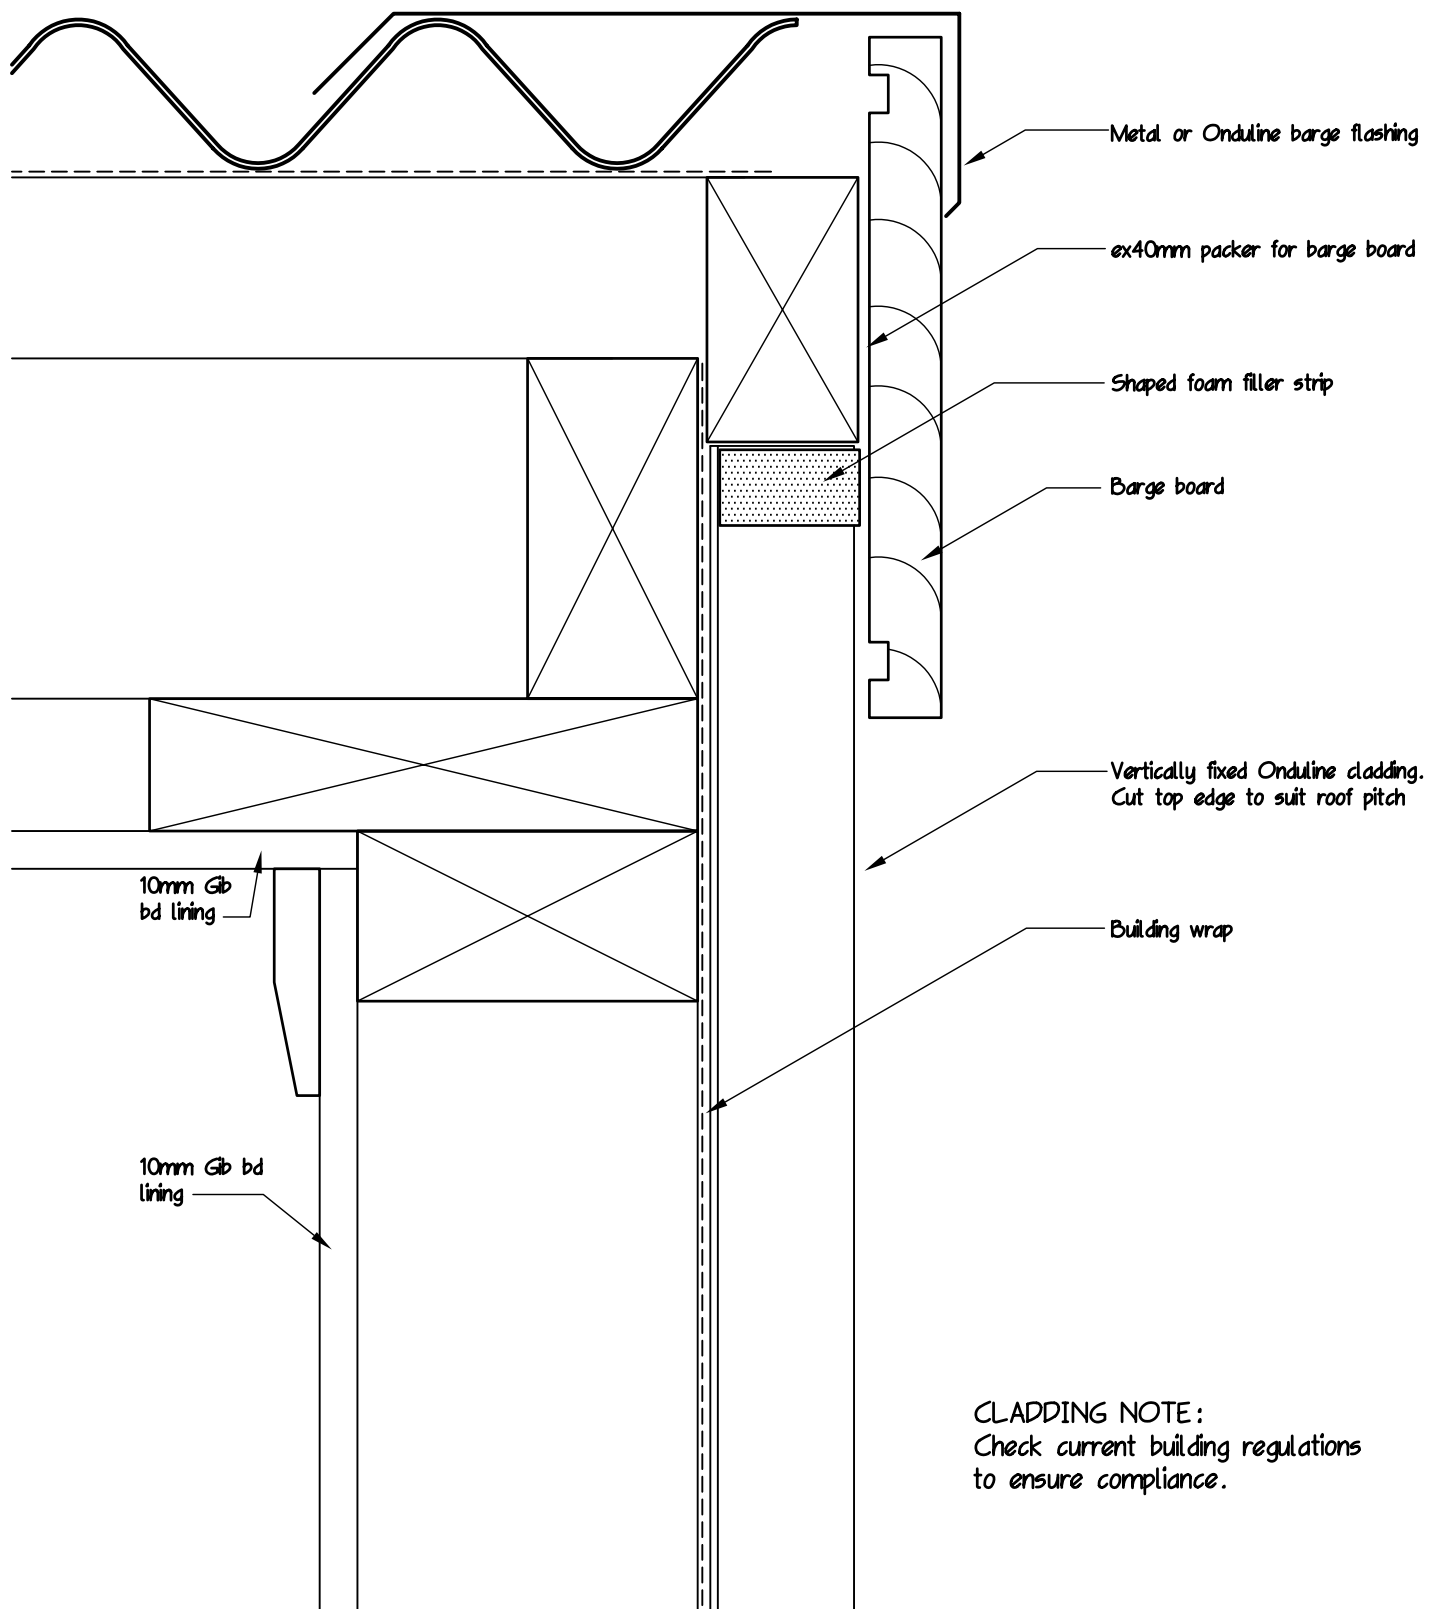

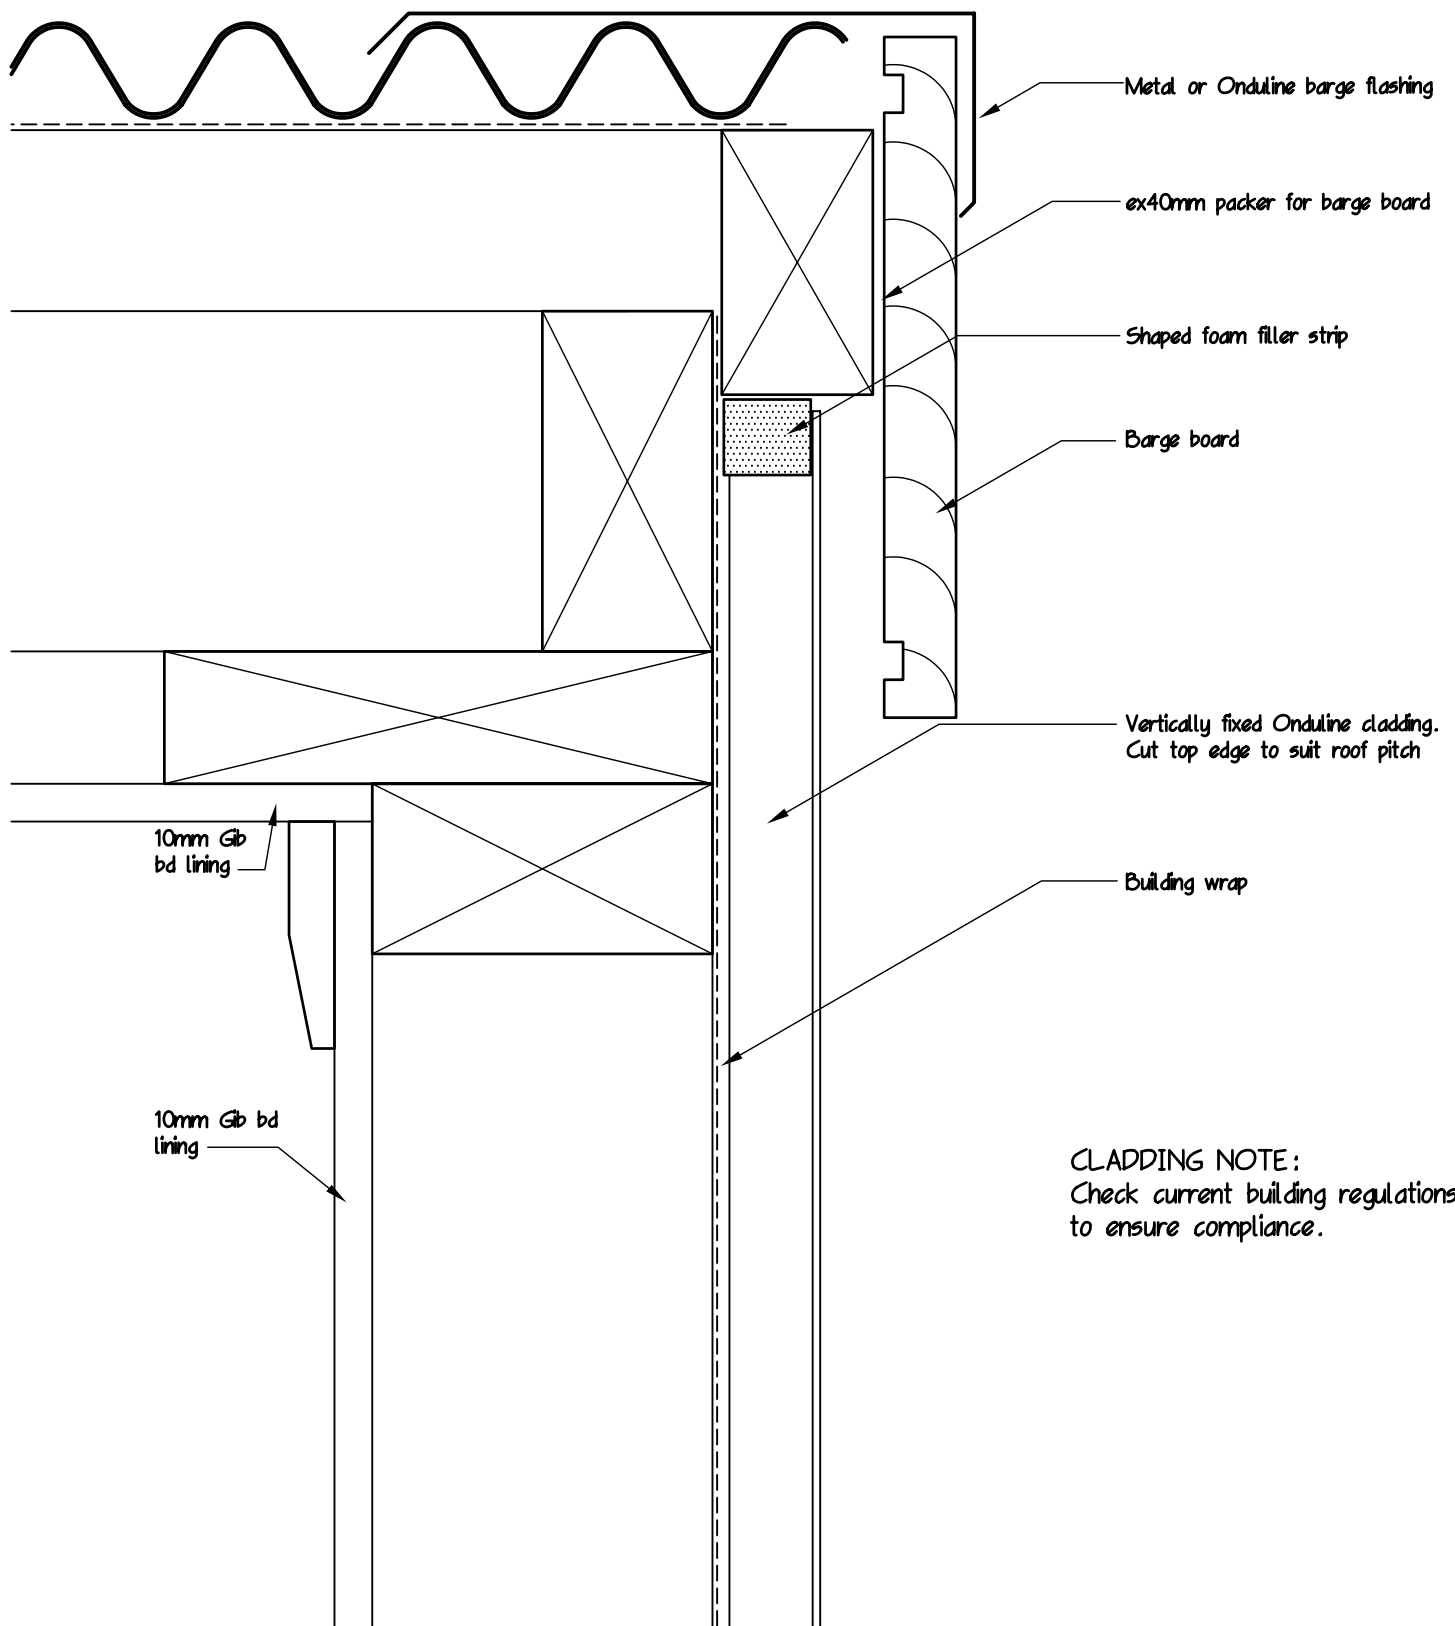


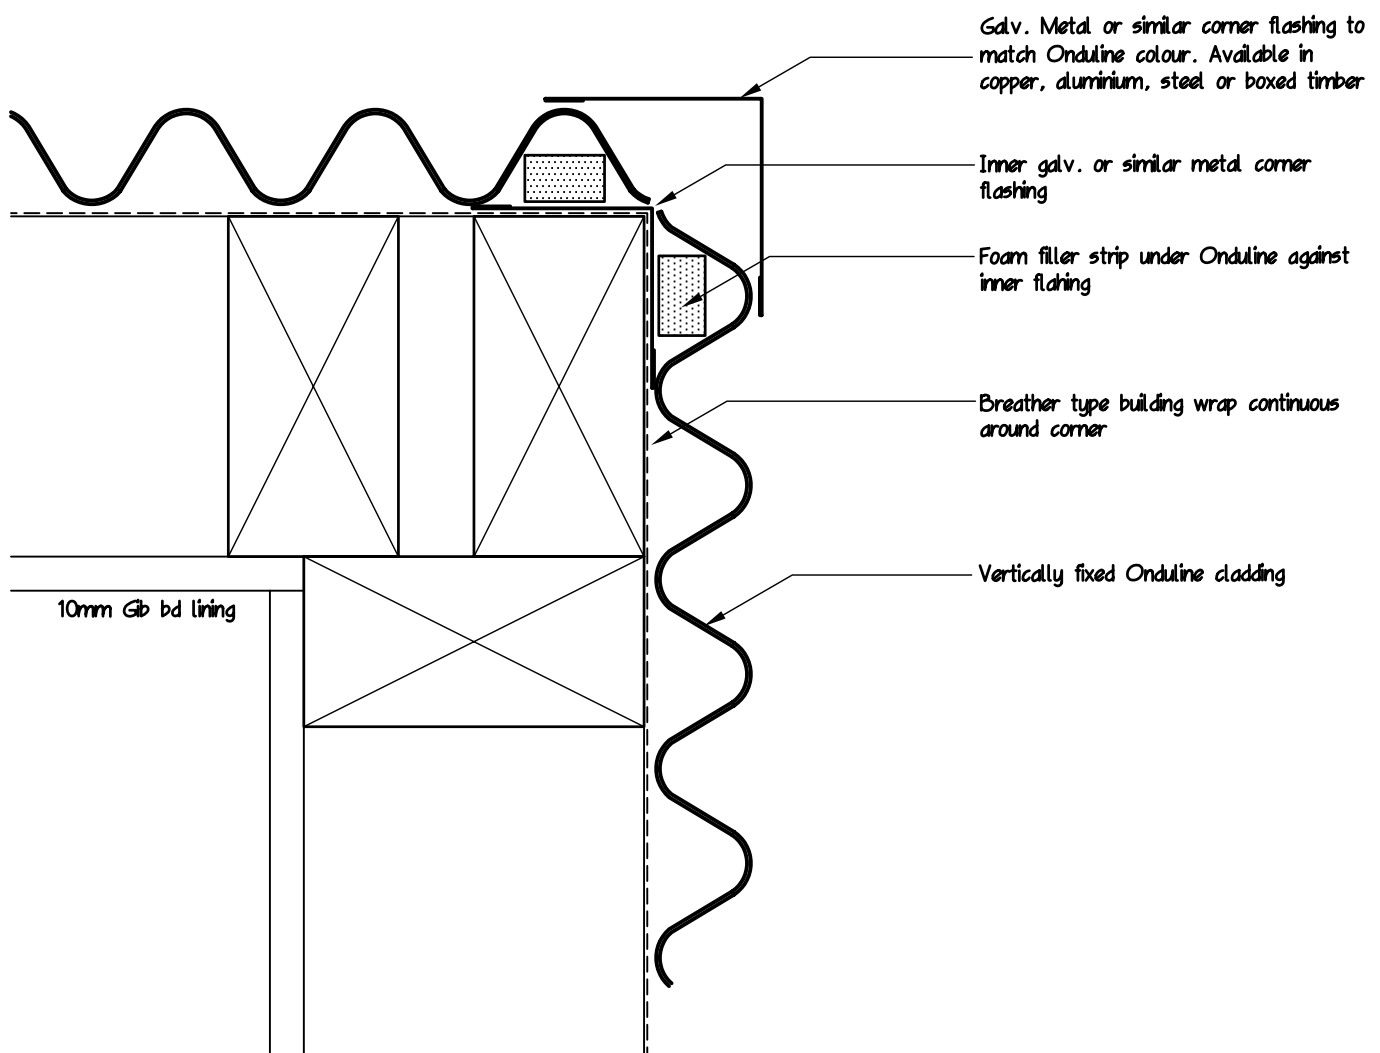

CLADDING NOTE:
Check current building regulations
to ensure compliance.

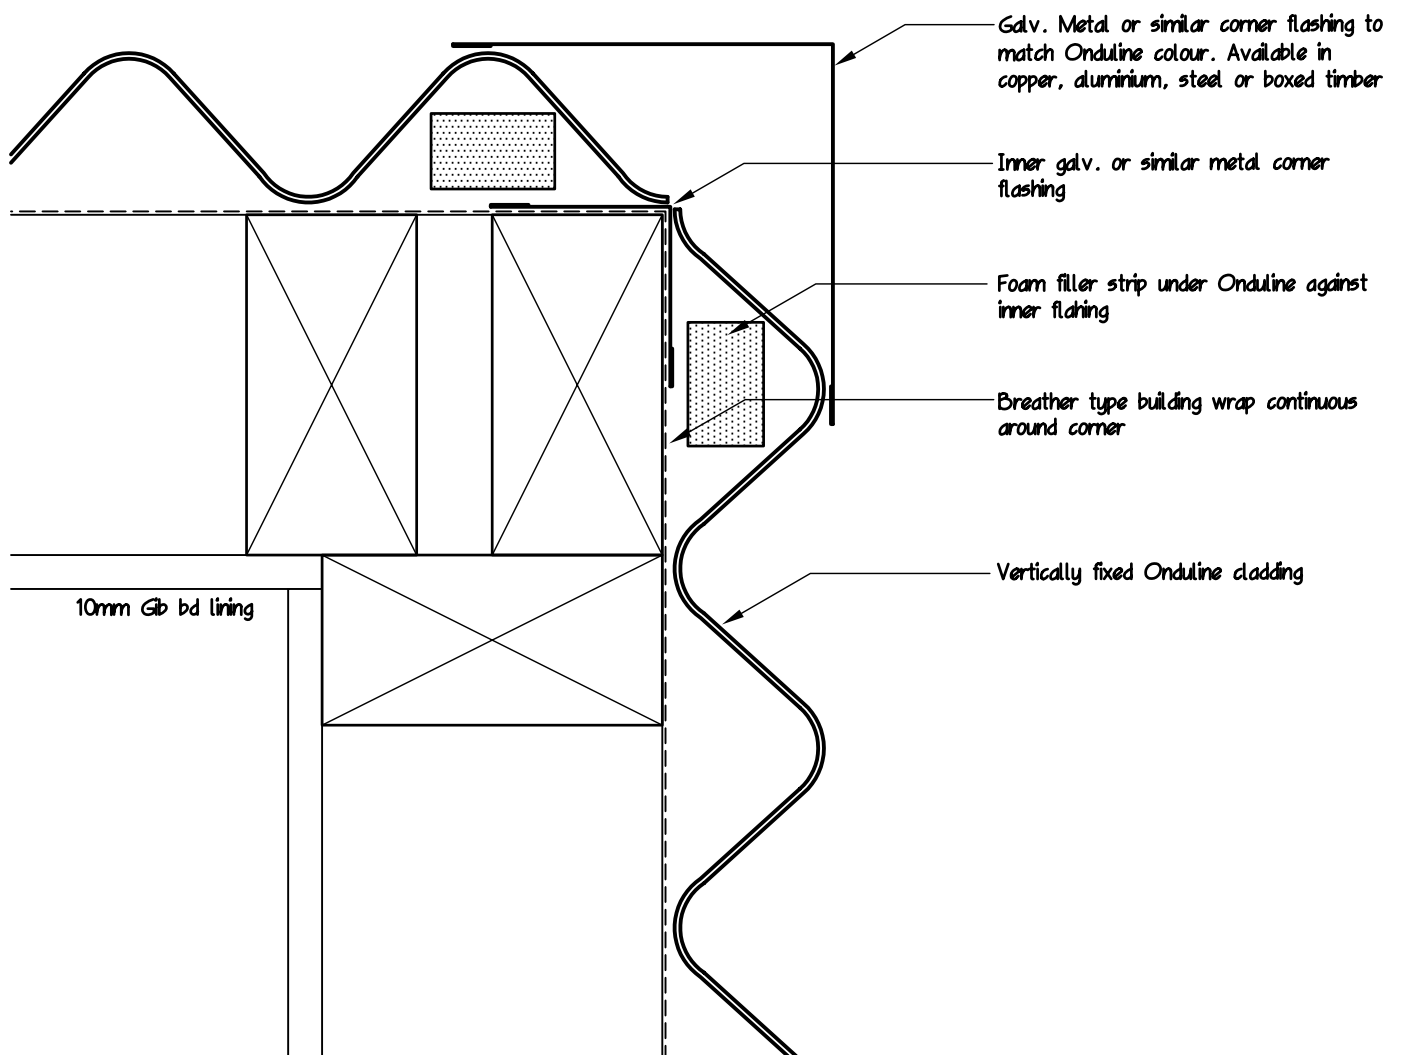


CLADDING NOTE:
Check current building regulations
to ensure compliance.

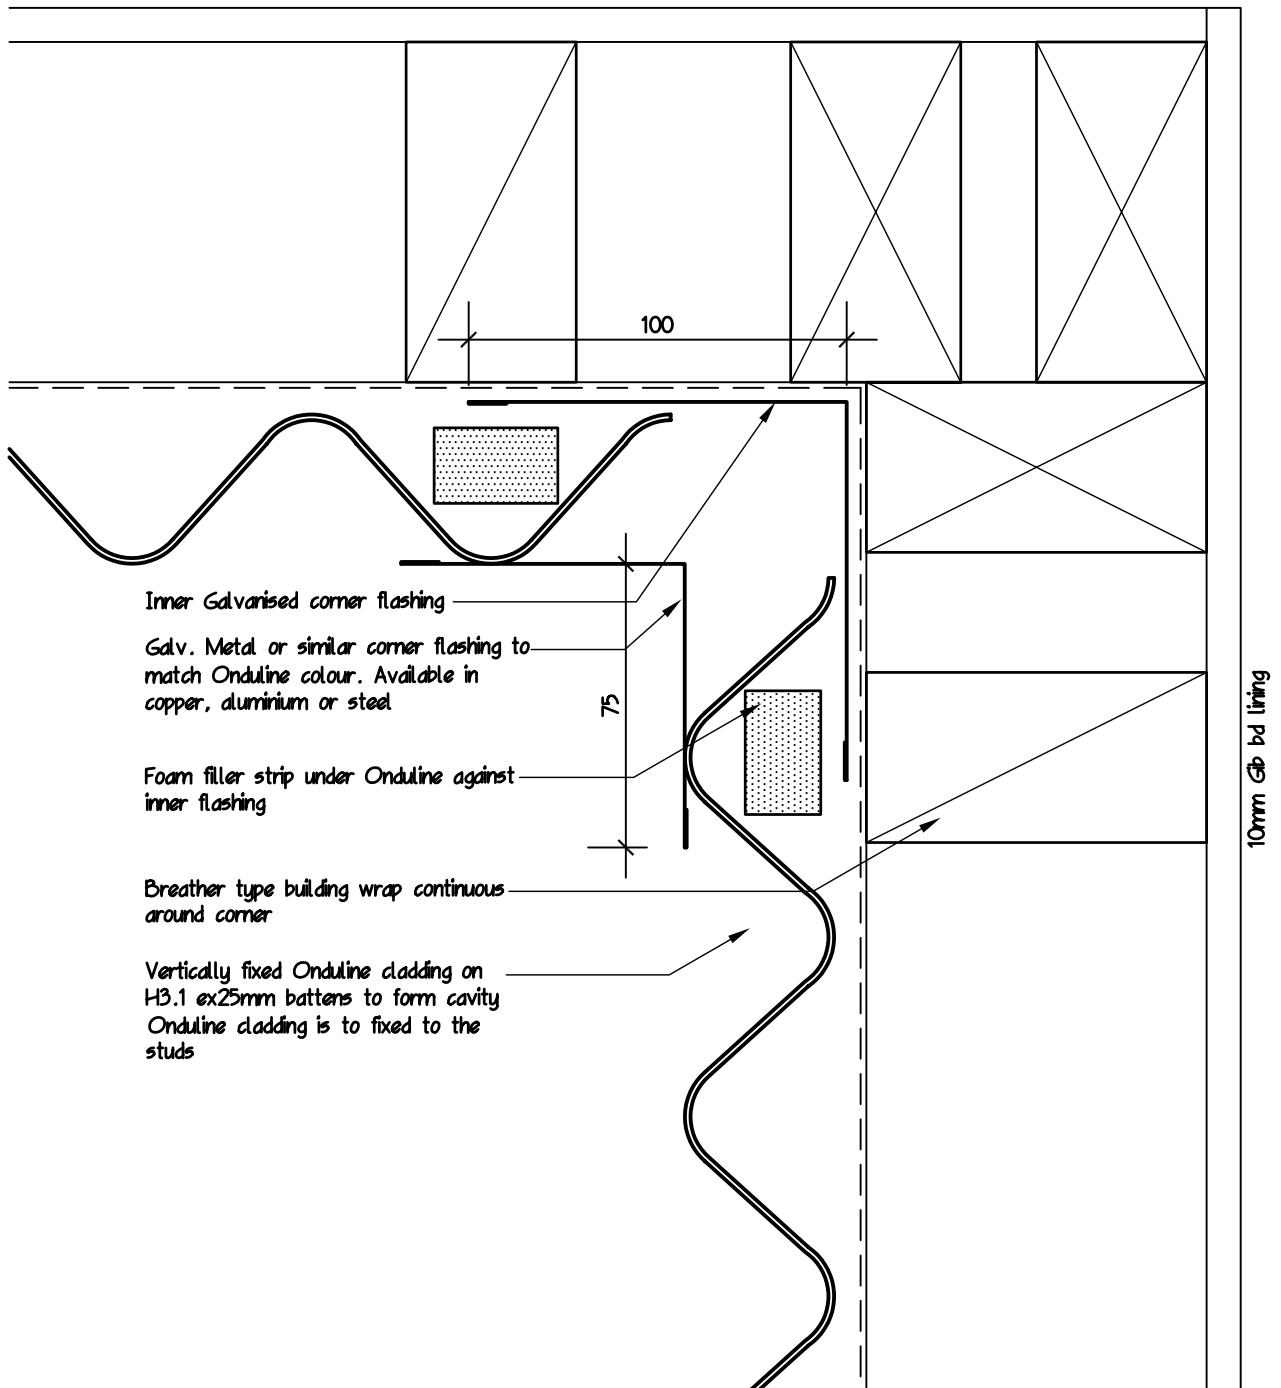

CLADDING NOTE:
Check current building regulations to ensure compliance.


Metal internal corner detail
scale 1:2

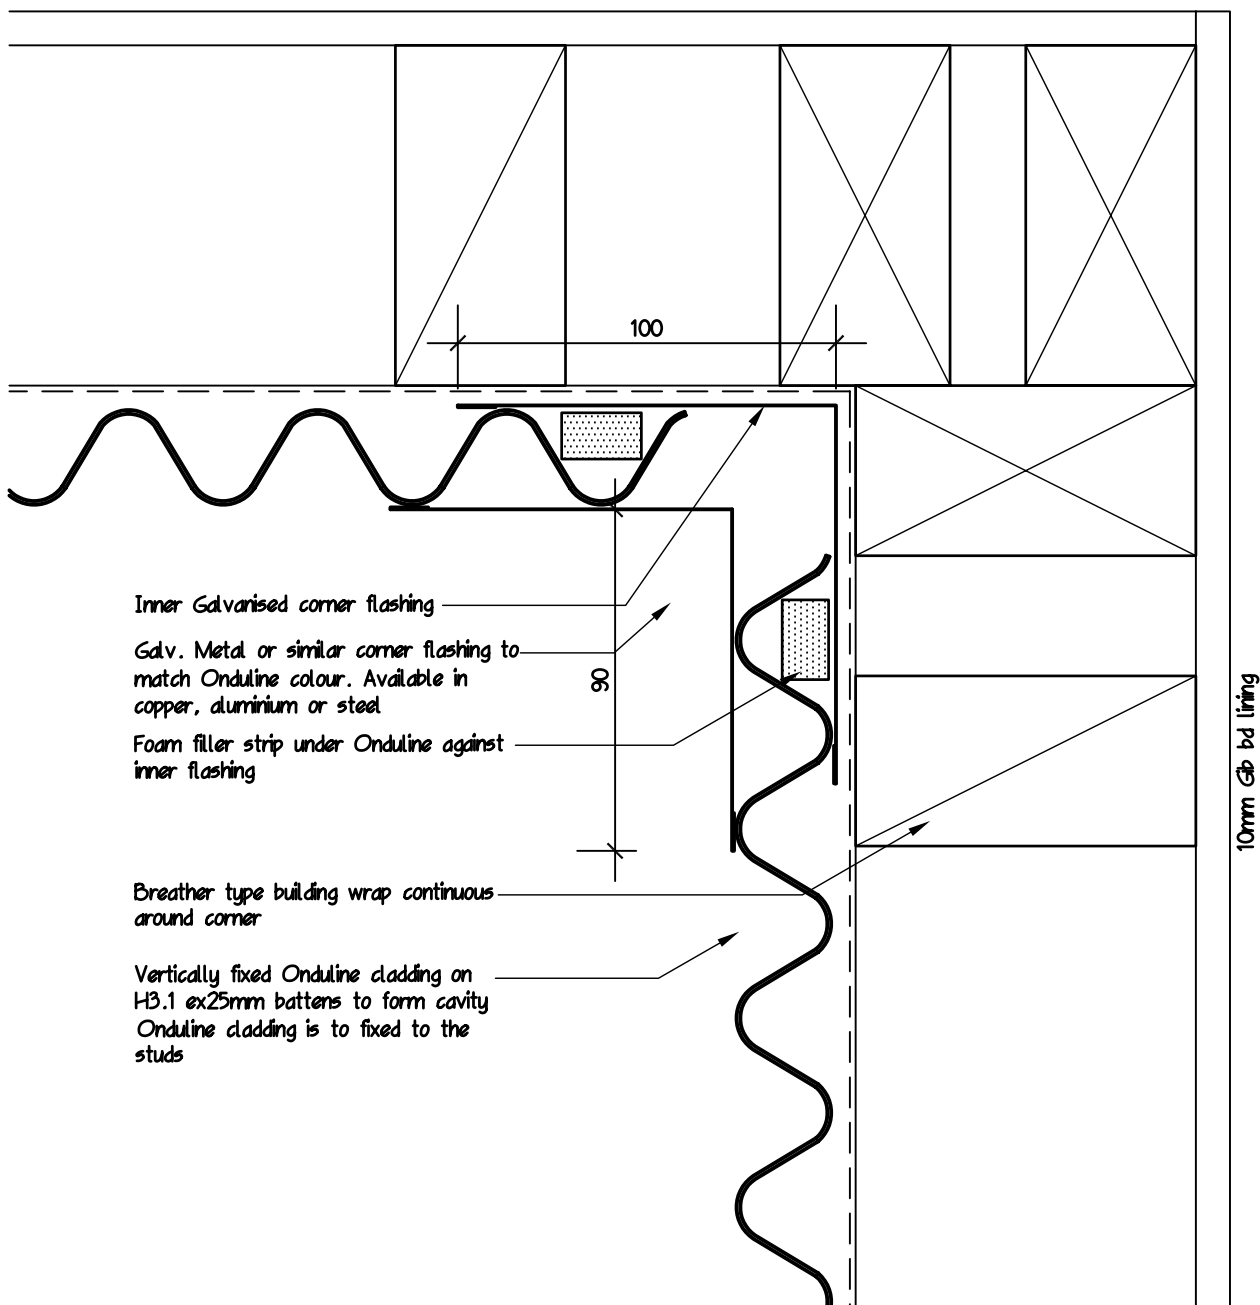

CLADDING NOTE:


Check current building regulations to ensure compliance.

Metal internal corner detail
scale 1:2

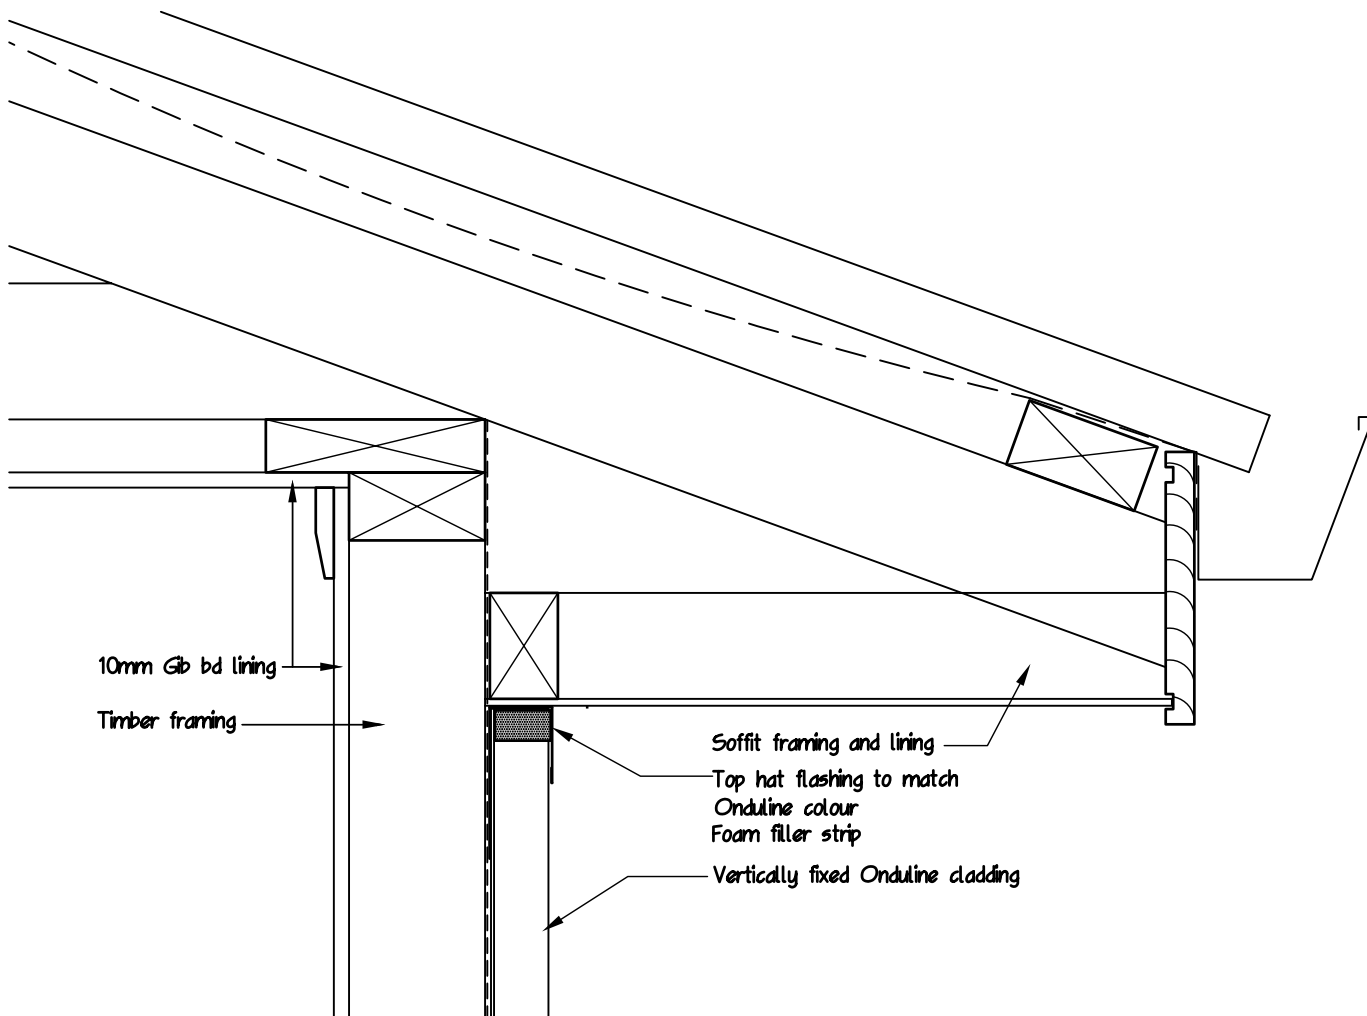

Eaves detail


scale 1:5

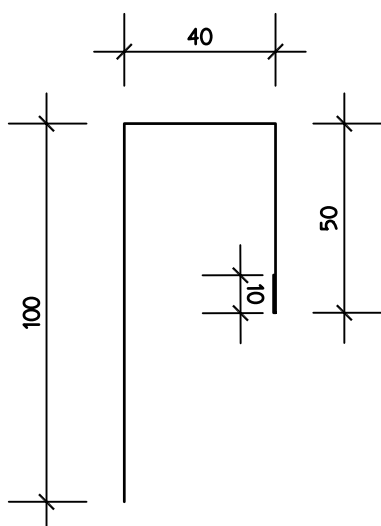


Flashing detail

scale 1:2

CLADDING NOTE:
Check current building regulations
to ensure compliance.

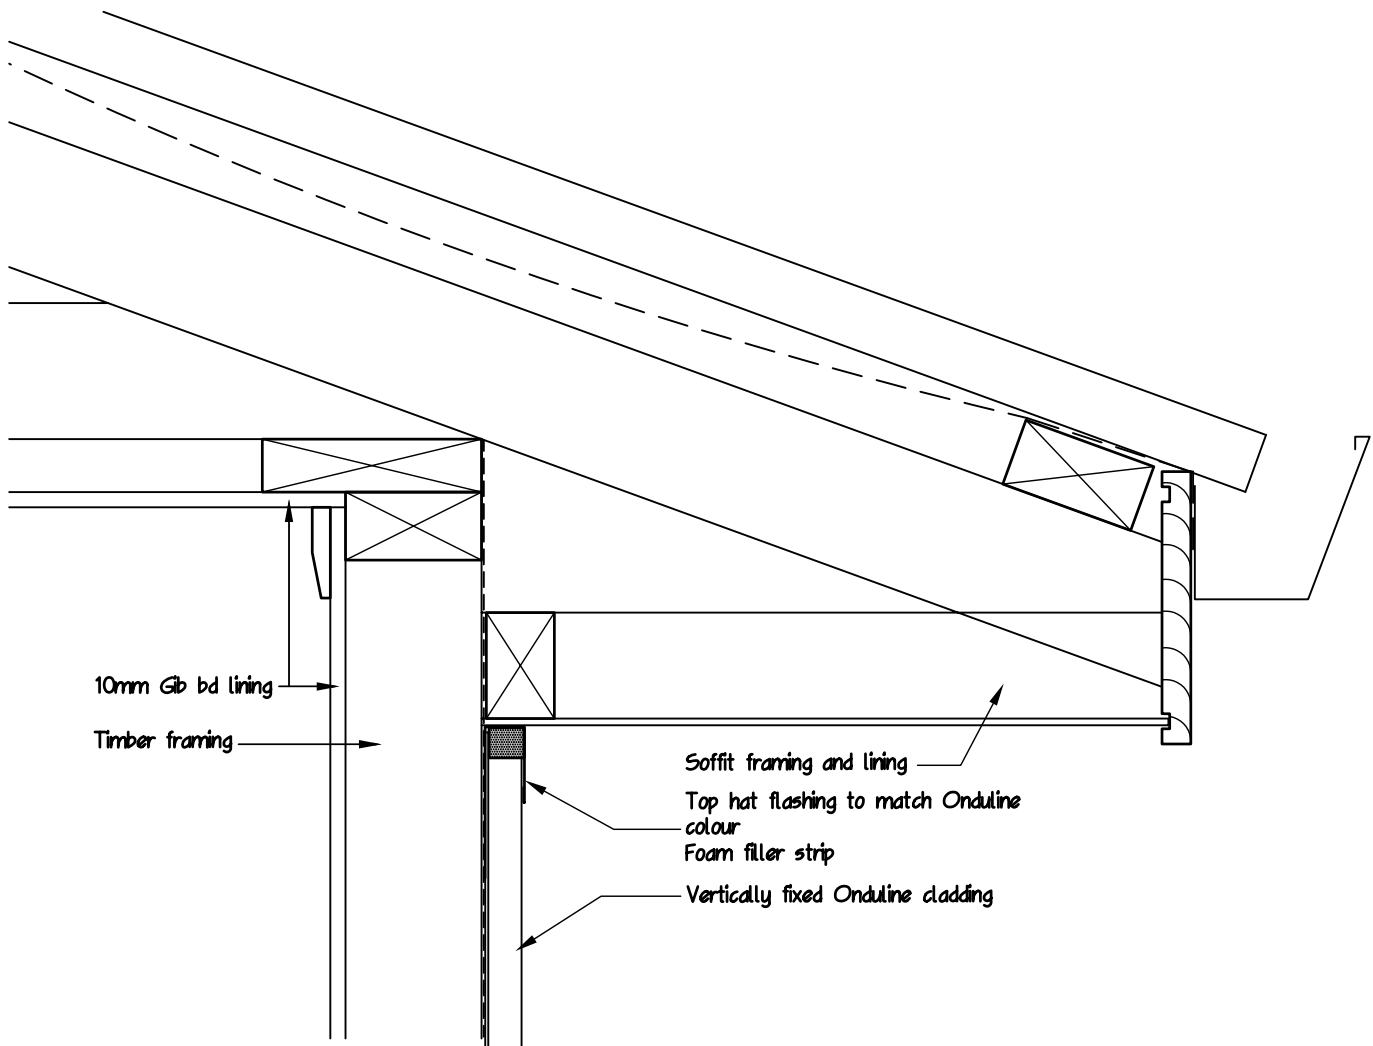


Eaves detail
scale 1:5

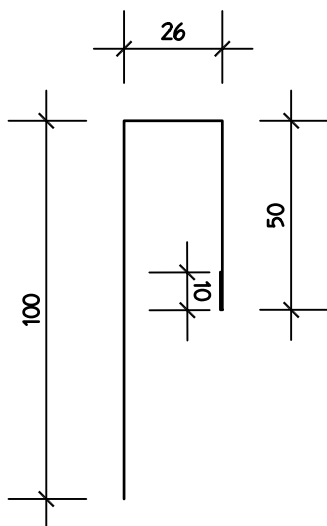


Flashing detail
scale 1:2

CLADDING NOTE:
Check current building regulations
to ensure compliance.

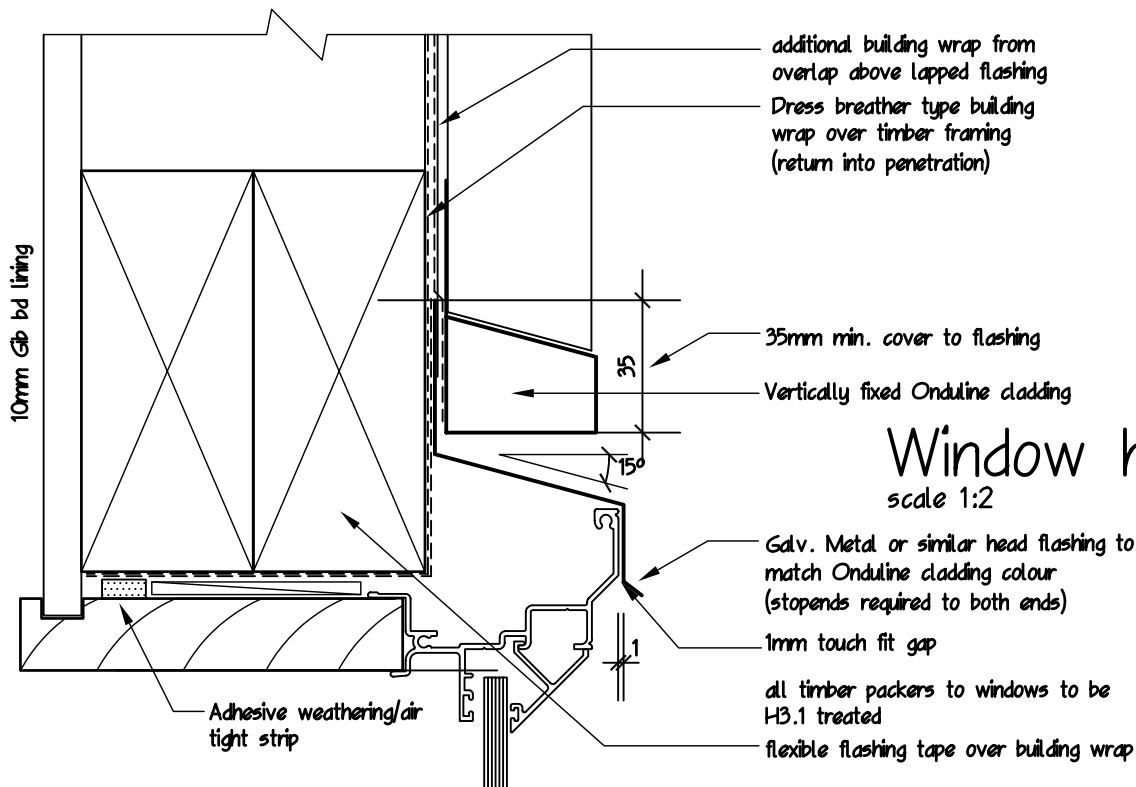


Window head detail

scale 1:2

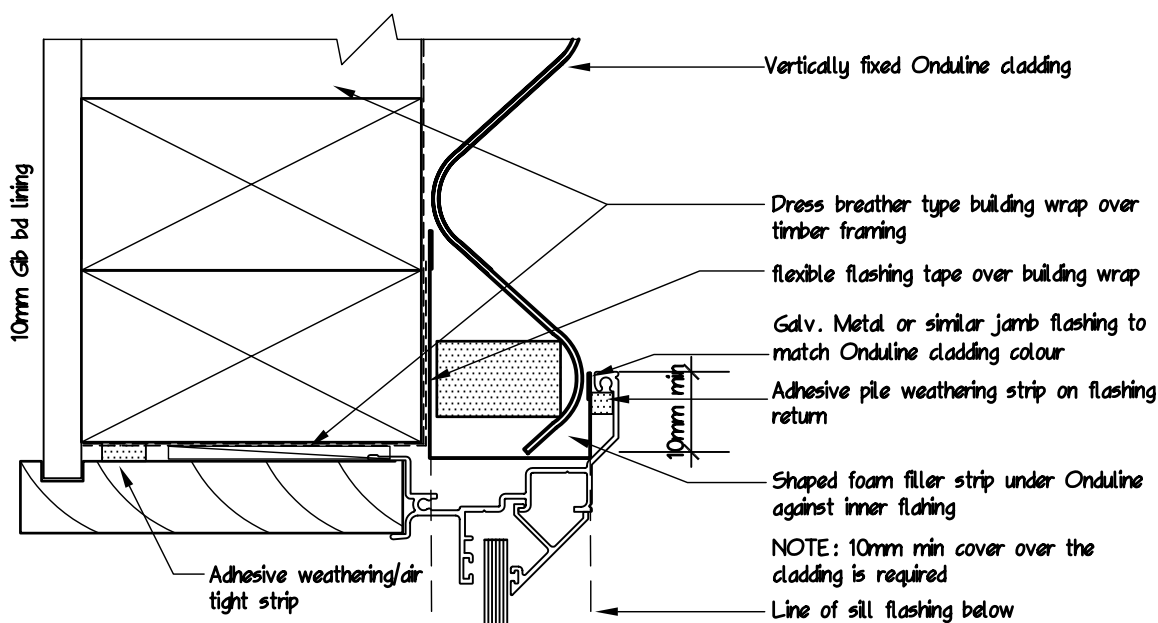

Window jamb detail


scale 1:2

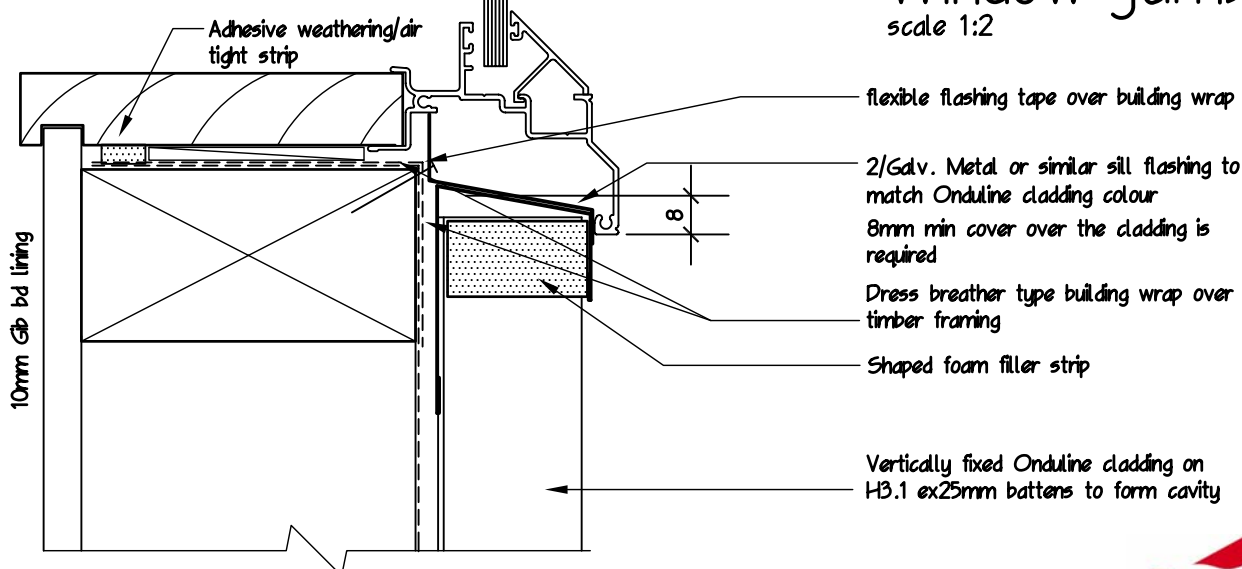

CLADDING NOTE:
Check current building regulations
to ensure compliance.


Window sill detail

scale 1:2

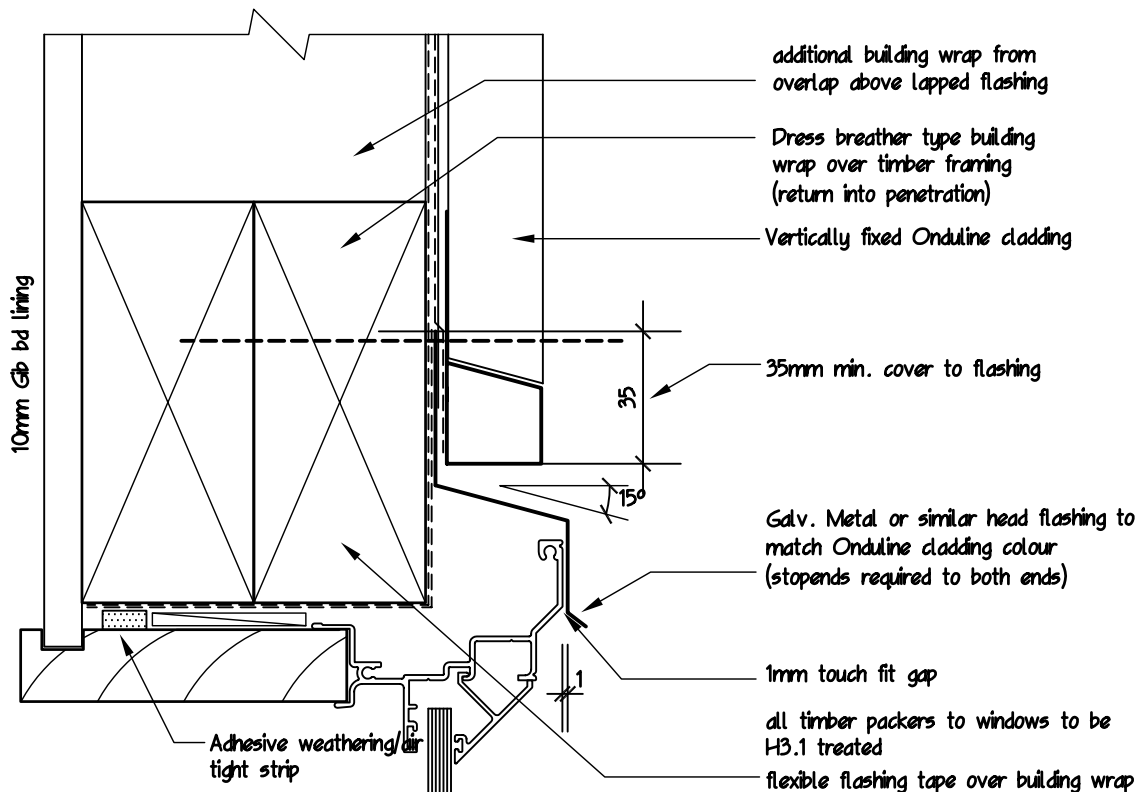


Window head detail

scale 1:2

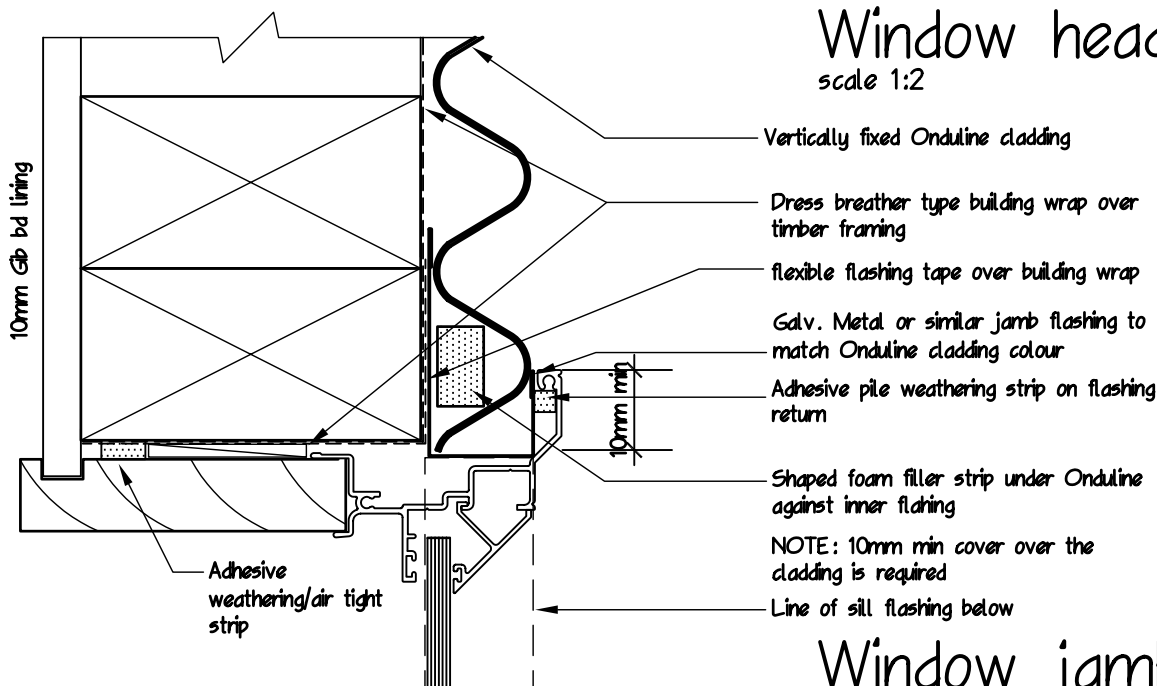

Window jamb detail


scale 1:2

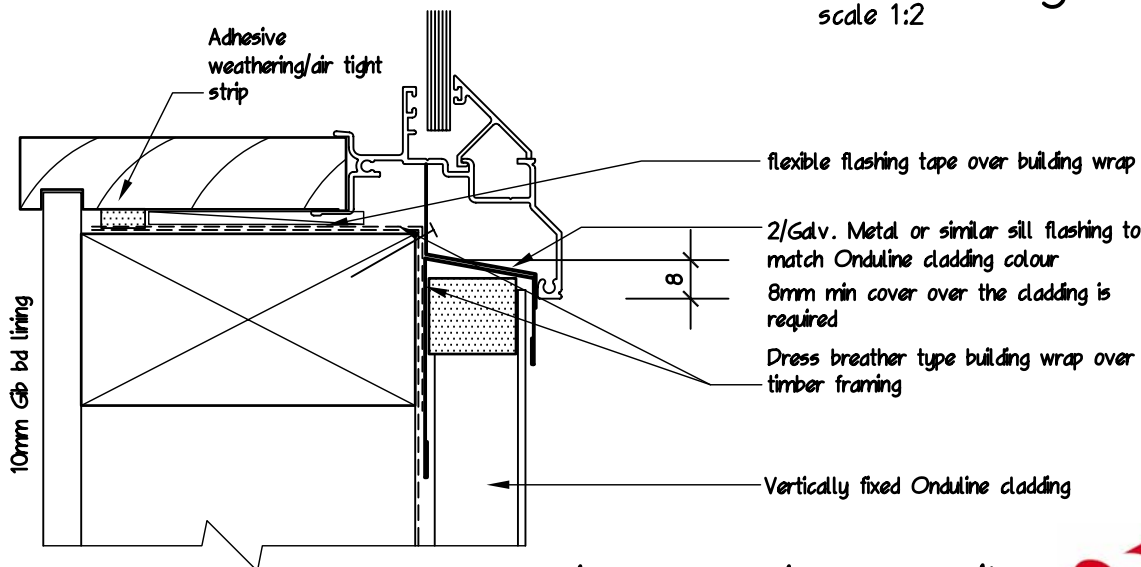


Window sill detail

scale 1:2

CLADDING NOTE:
Check current building regulations to ensure compliance.

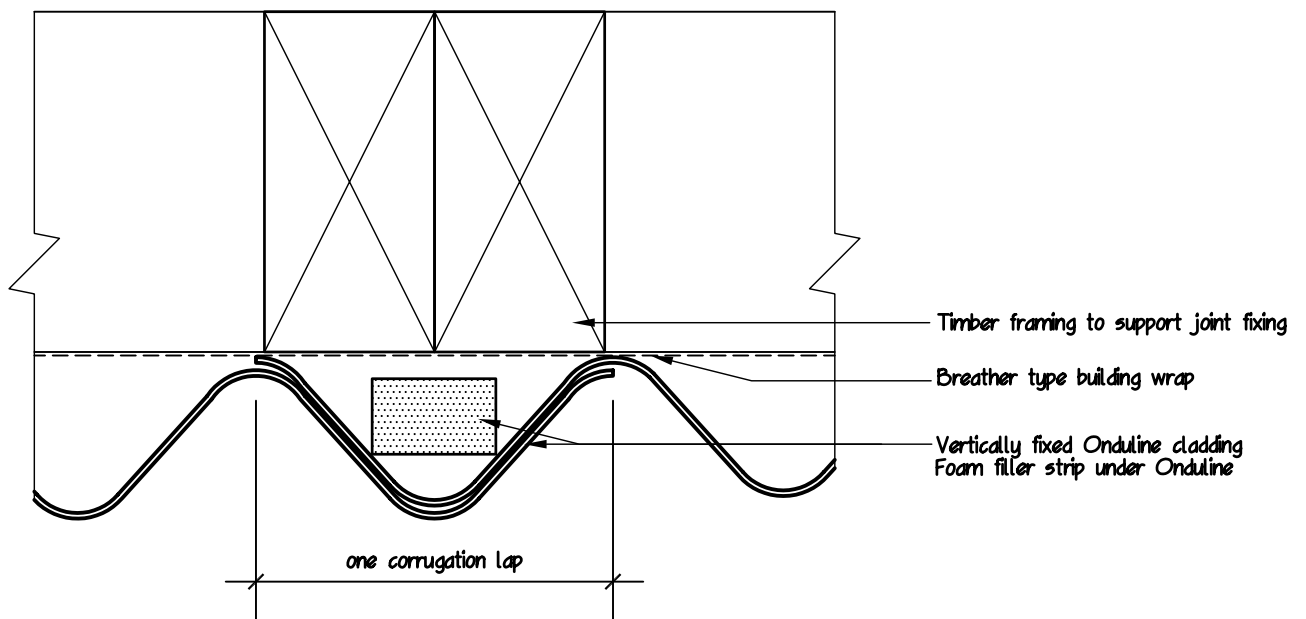


CLADDING NOTE:
Check current building regulations
to ensure compliance.

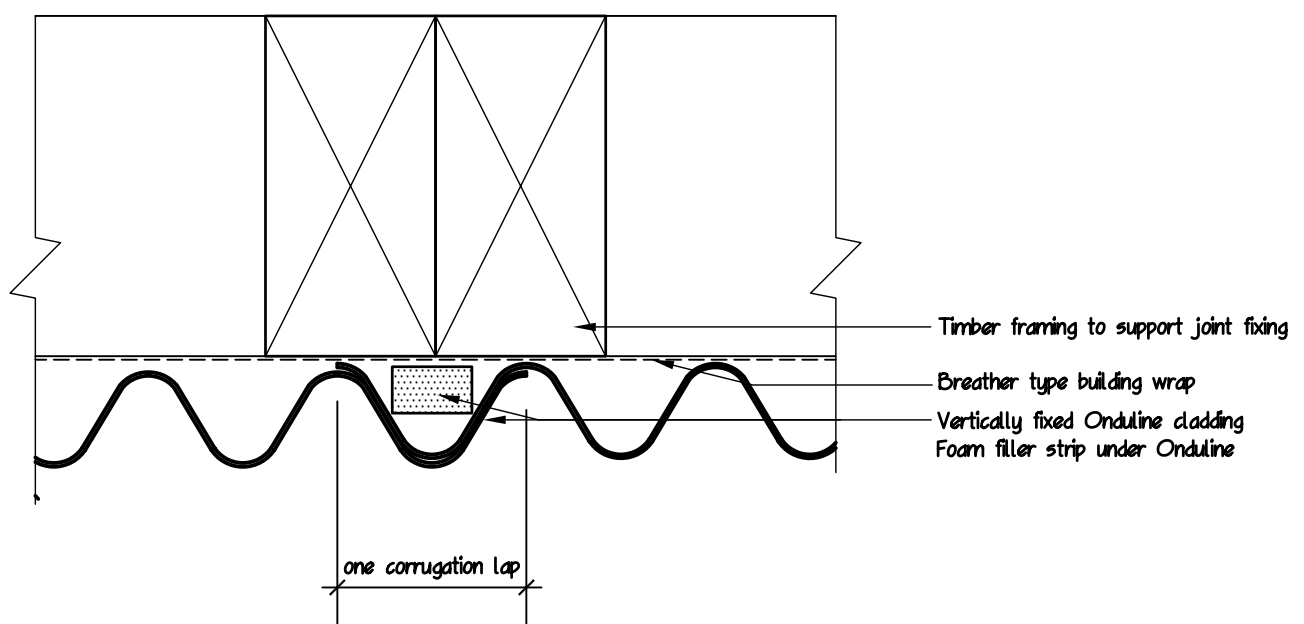


CLADDING NOTE:
Check current building regulations
to ensure compliance.

CLADDING NOTE:
Check current building regulations to
ensure compliance.

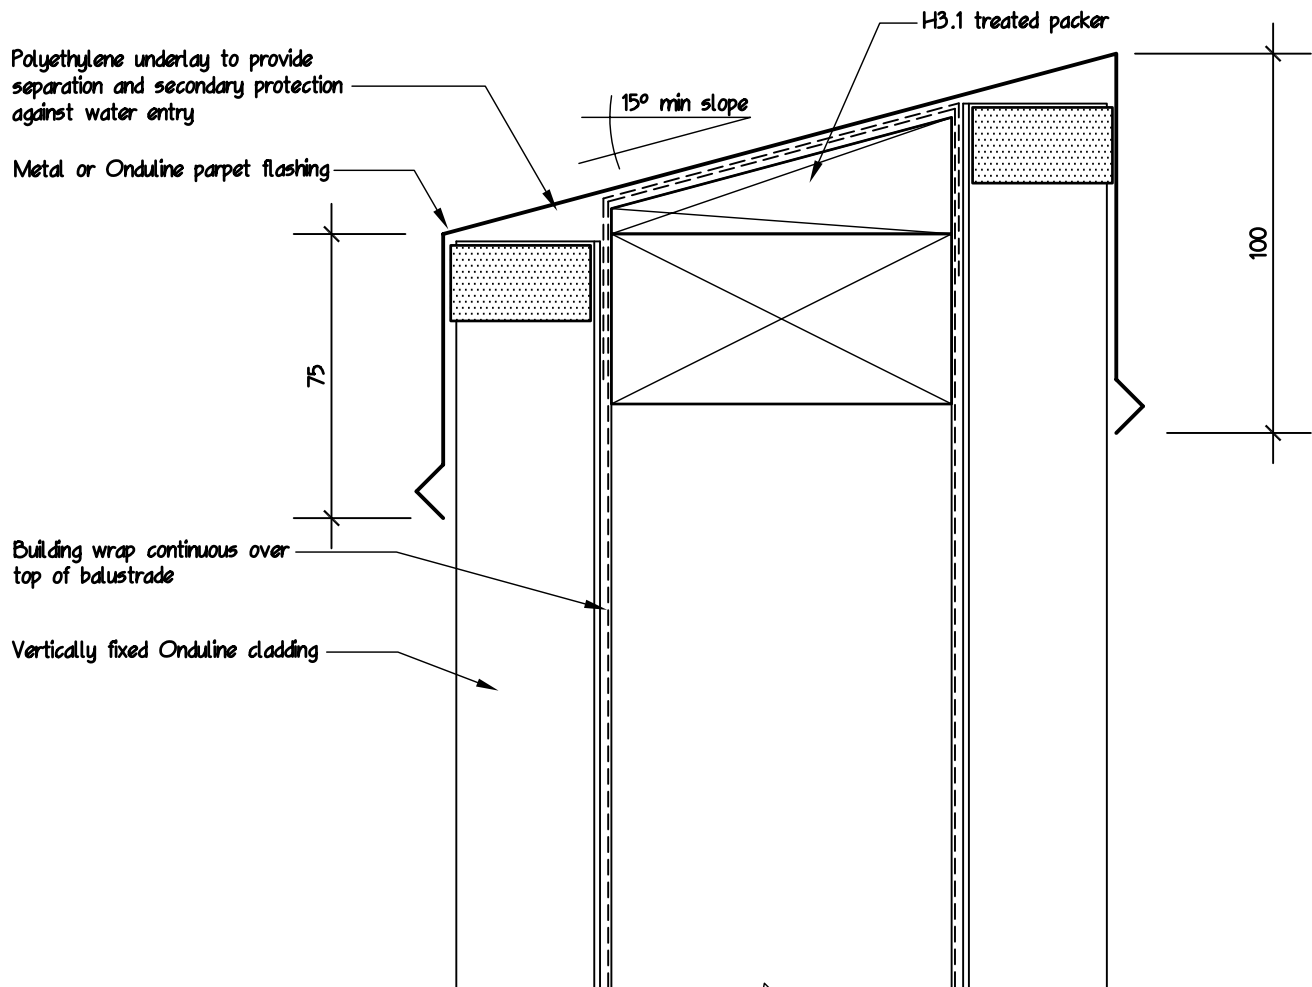


enclosed balustrade cross section
scale 1:5

CLADDING NOTE:
Check current building regulations to
ensure compliance.

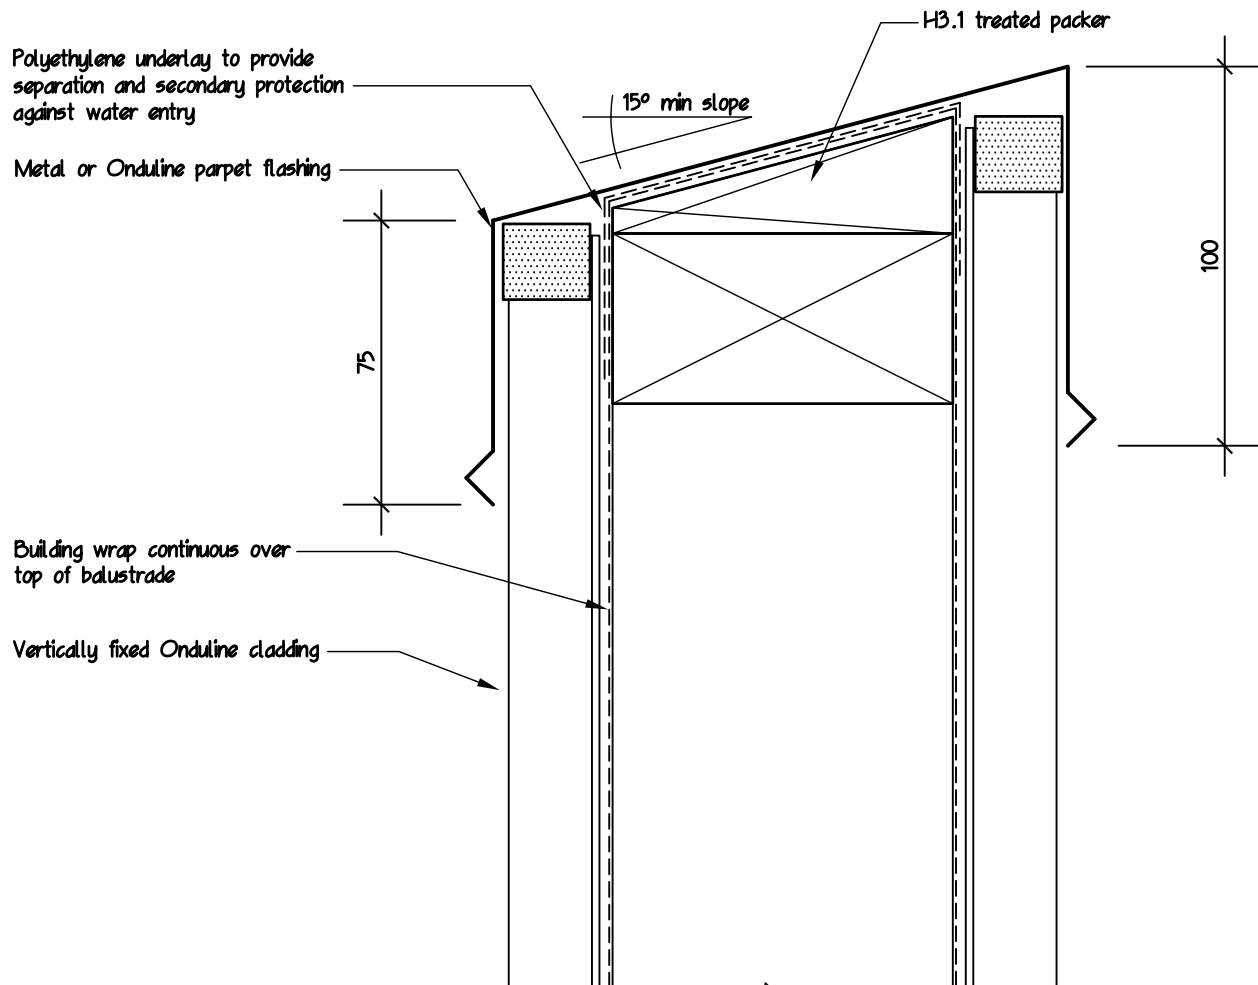


enclosed balustrade cross section
scale 1:5

CLADDING NOTE:
Check current building regulations to
ensure compliance.

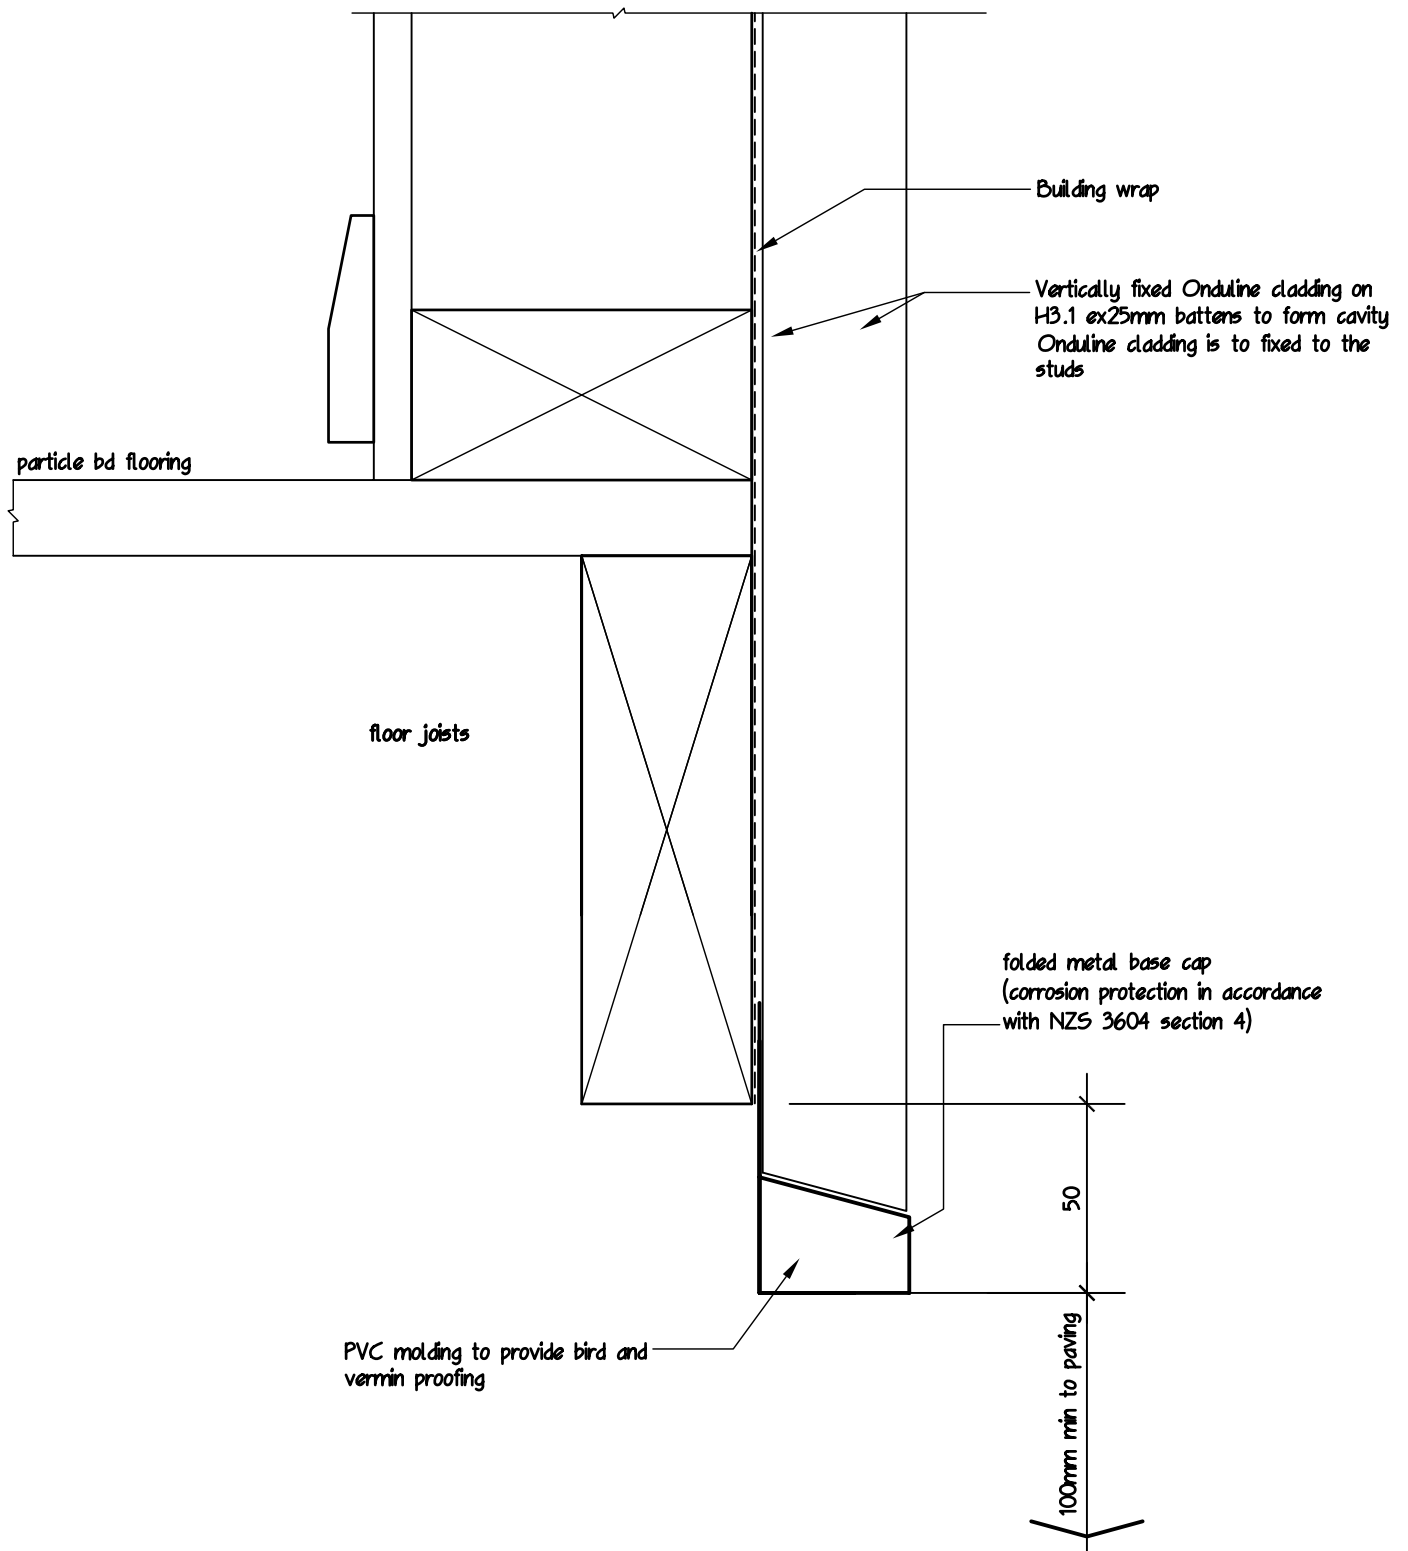


base of wall detail
scale 1:5

CLADDING NOTE:
Check current building regulations to
ensure compliance.

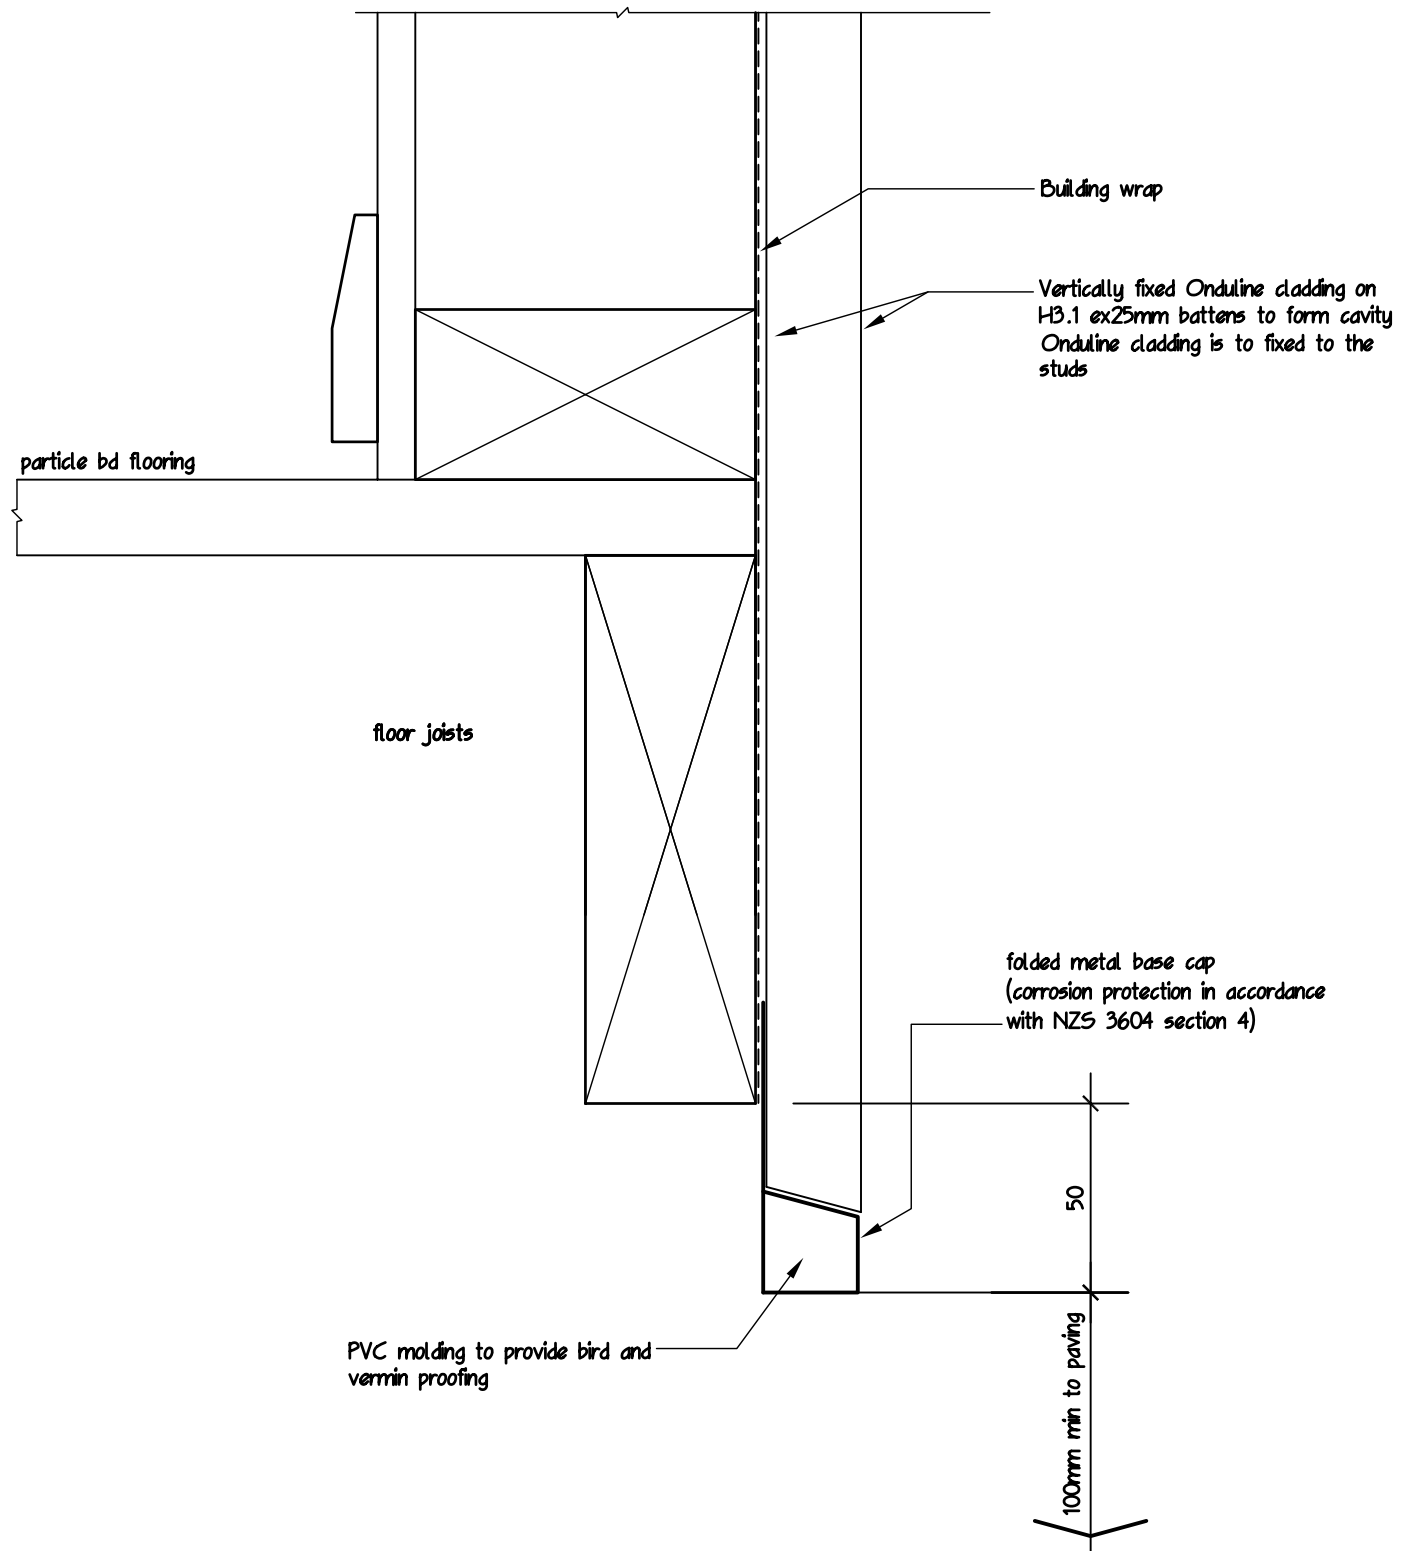

base of wall detail
scale 1:5

CLADDING NOTE:
Check current building regulations to
ensure compliance.

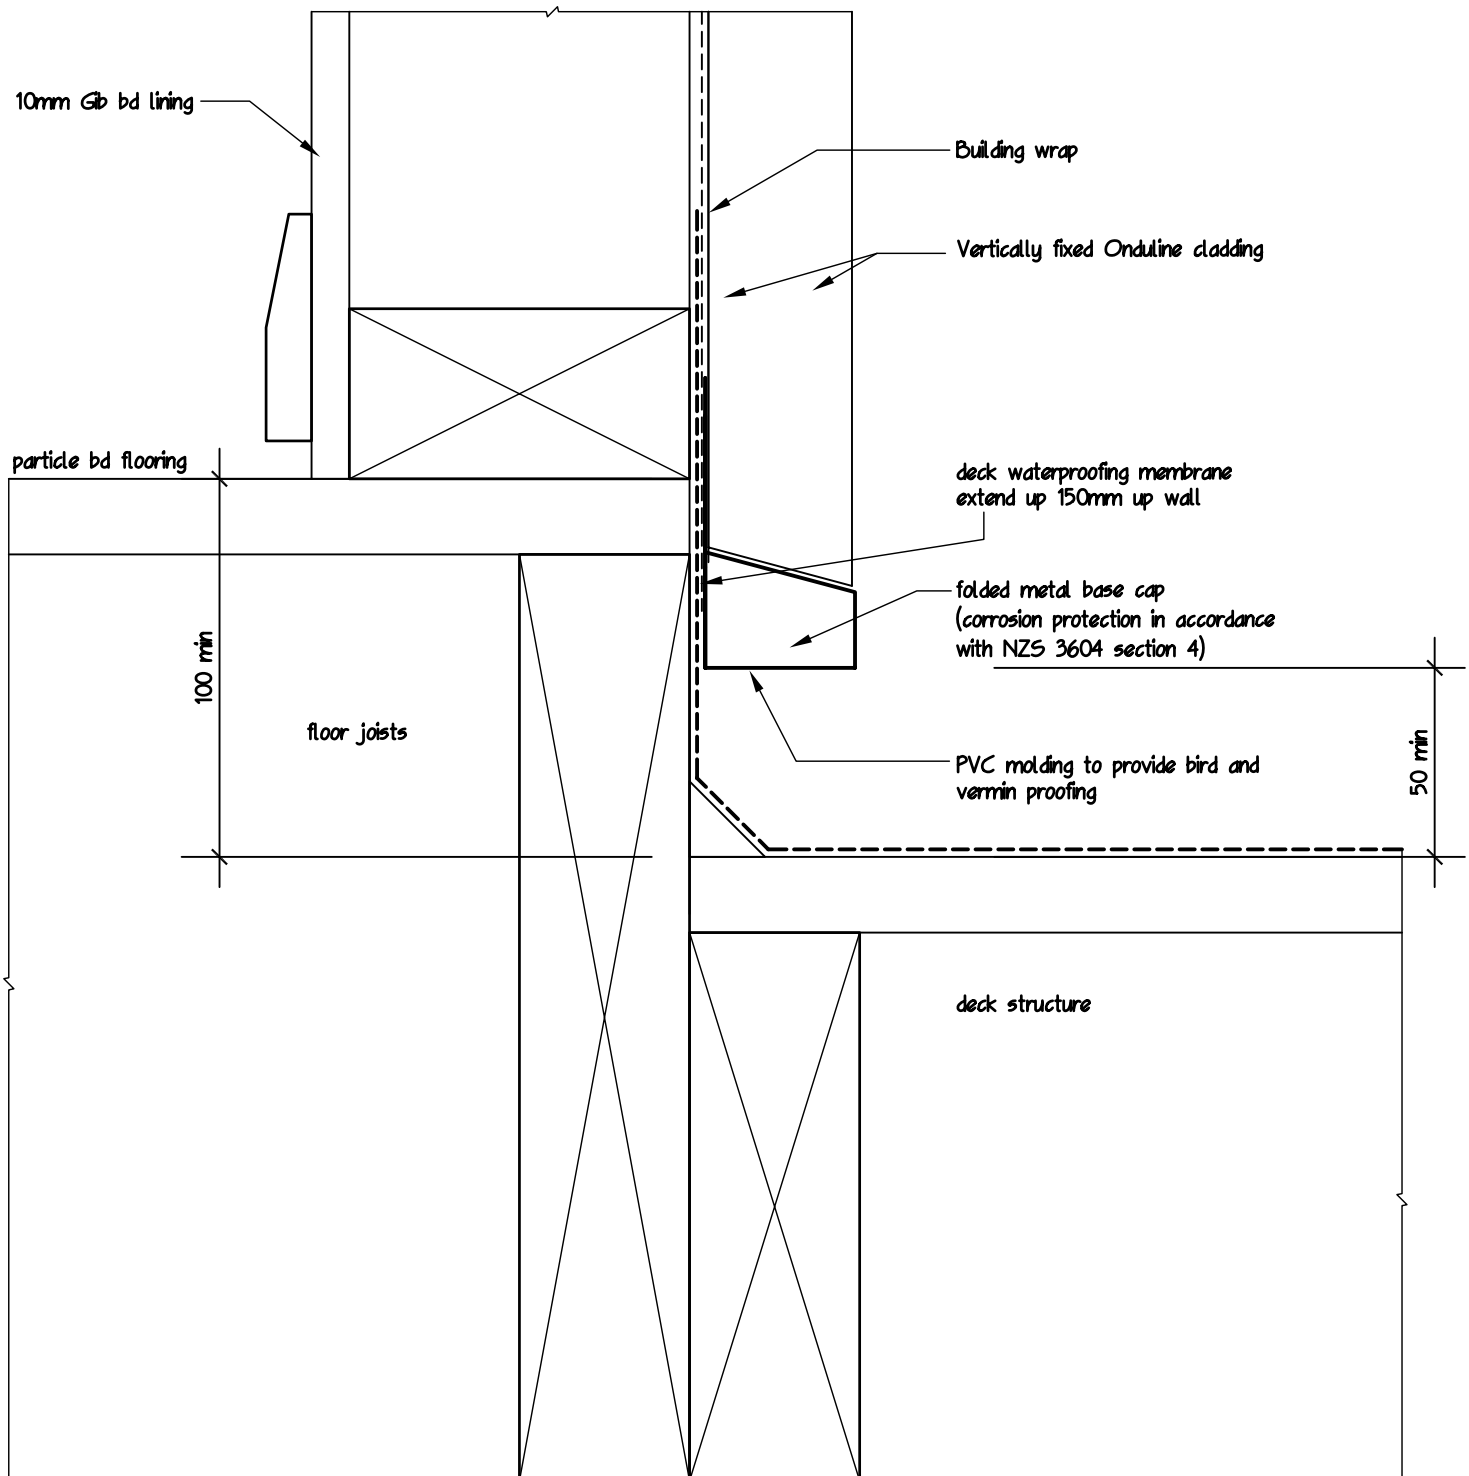


floor/balcony junction detail
scale 1:5

Onduline

page 17


CLADDING NOTE:
Check current building regulations to
ensure compliance.

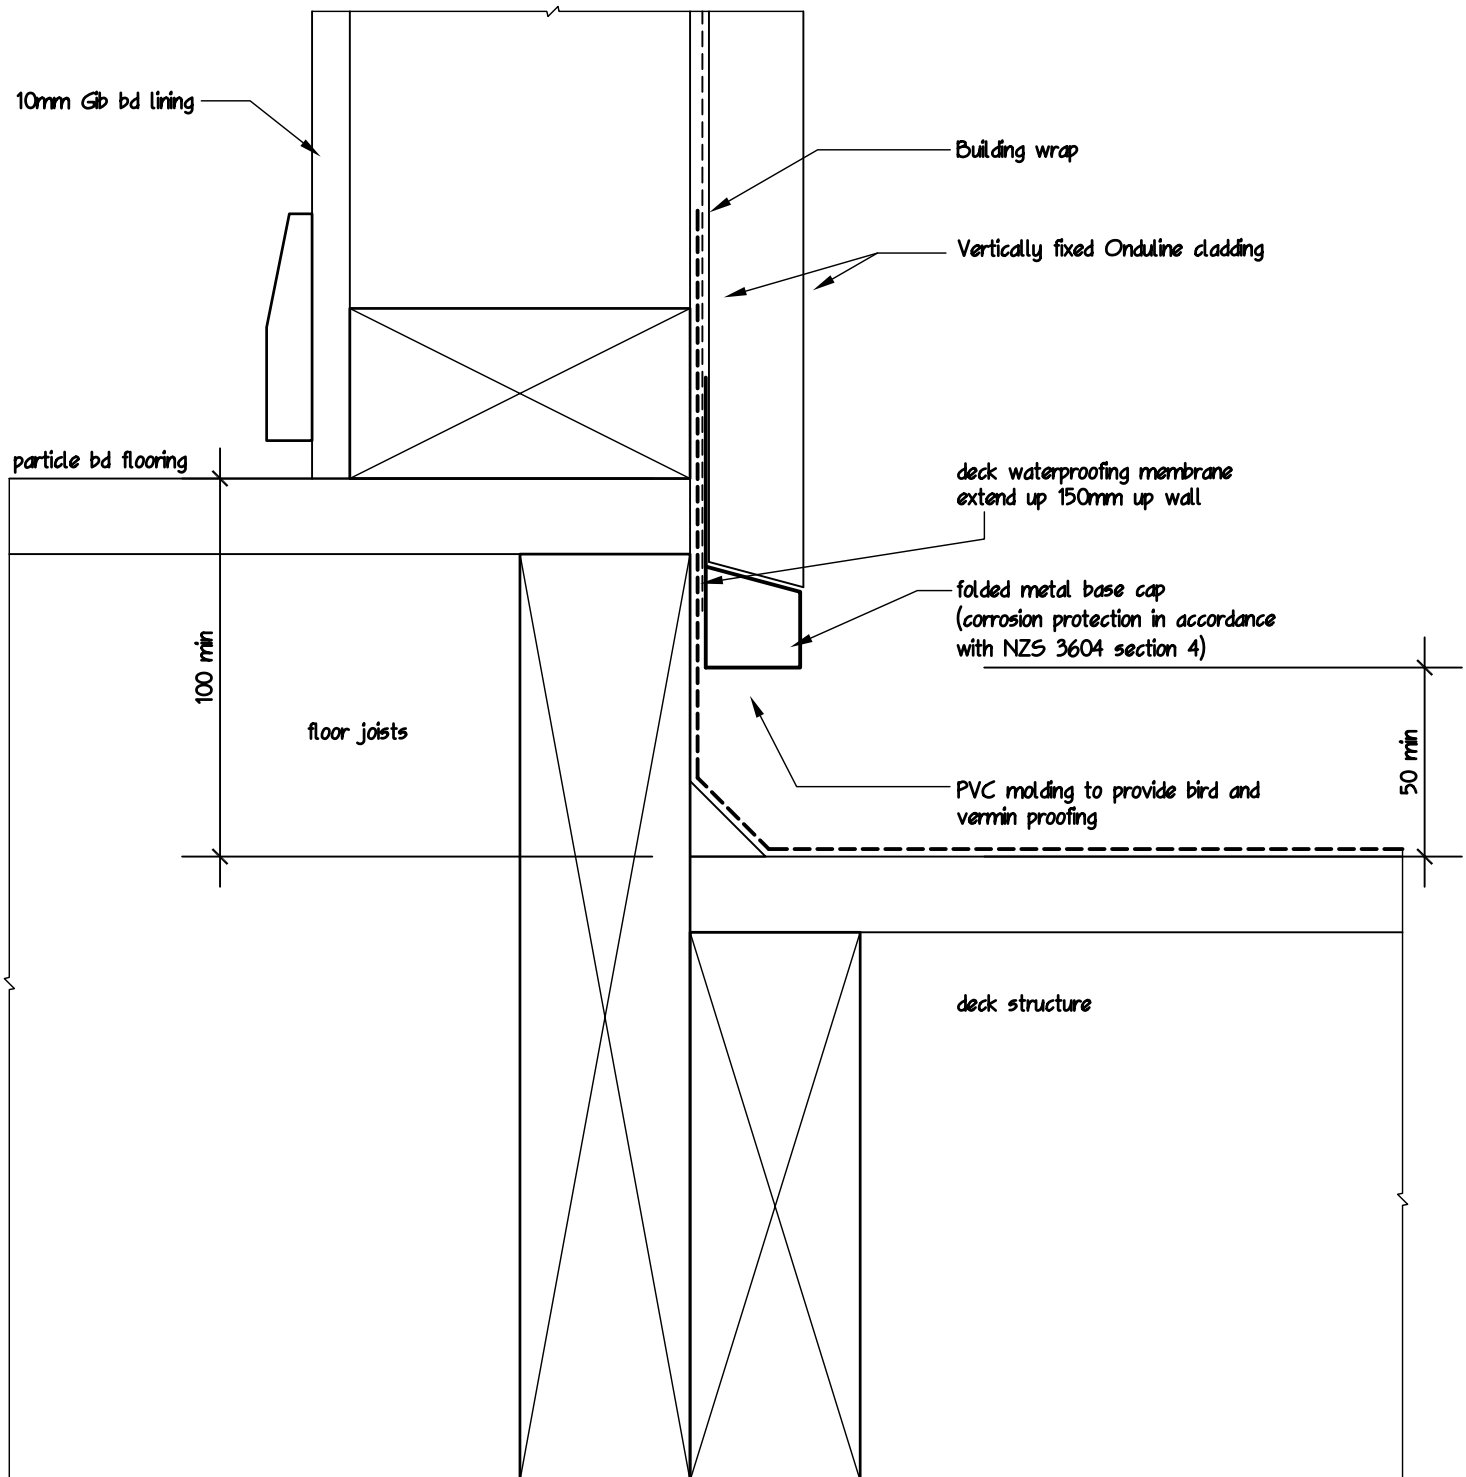

floor/balcony junction detail
scale 1:5


10mm G10 bd lining on timber framing

CLADDING NOTE:
Check current building regulations to
ensure compliance.

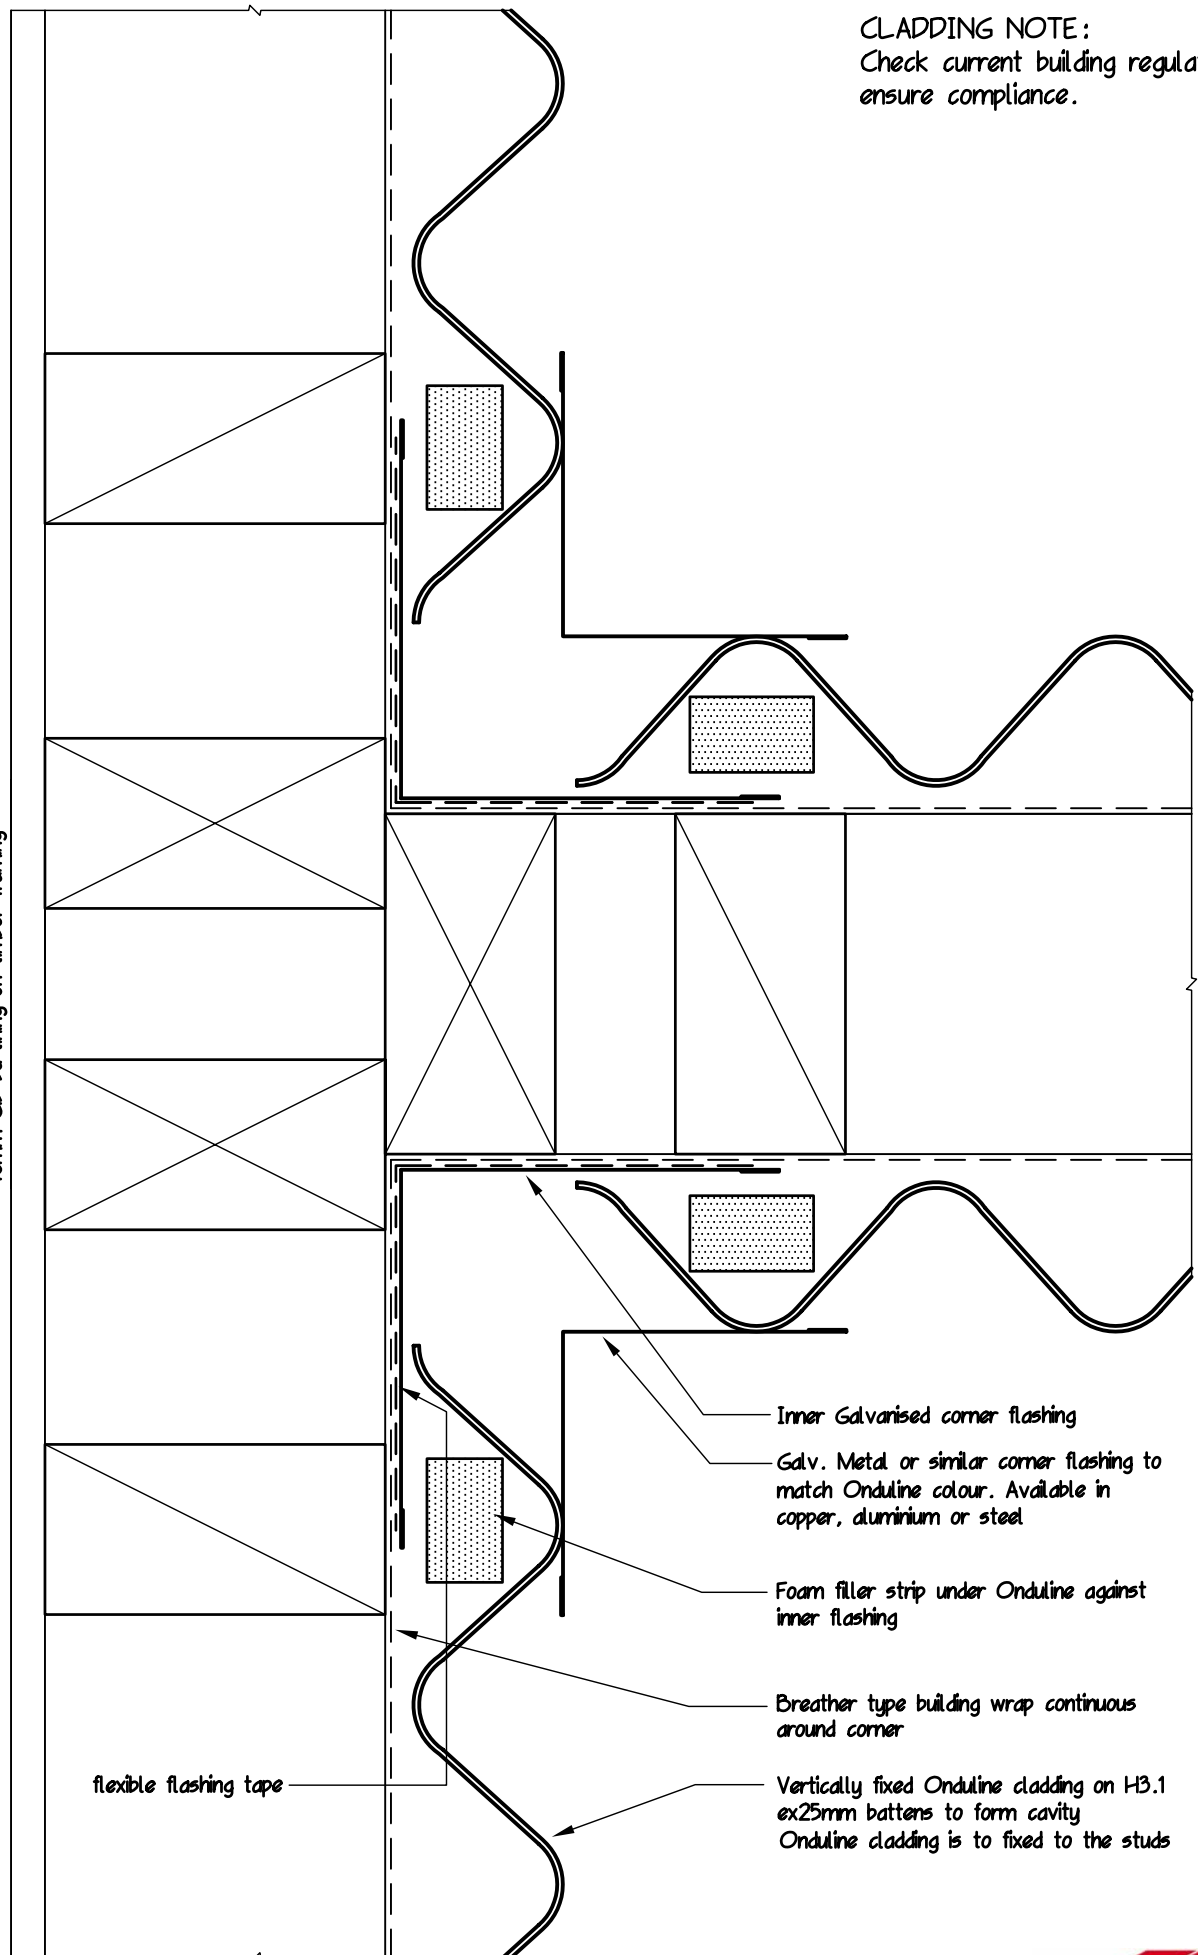

10mm Gb bd lining on timber framing

CLADDING NOTE:
Check current building regulations to ensure compliance.

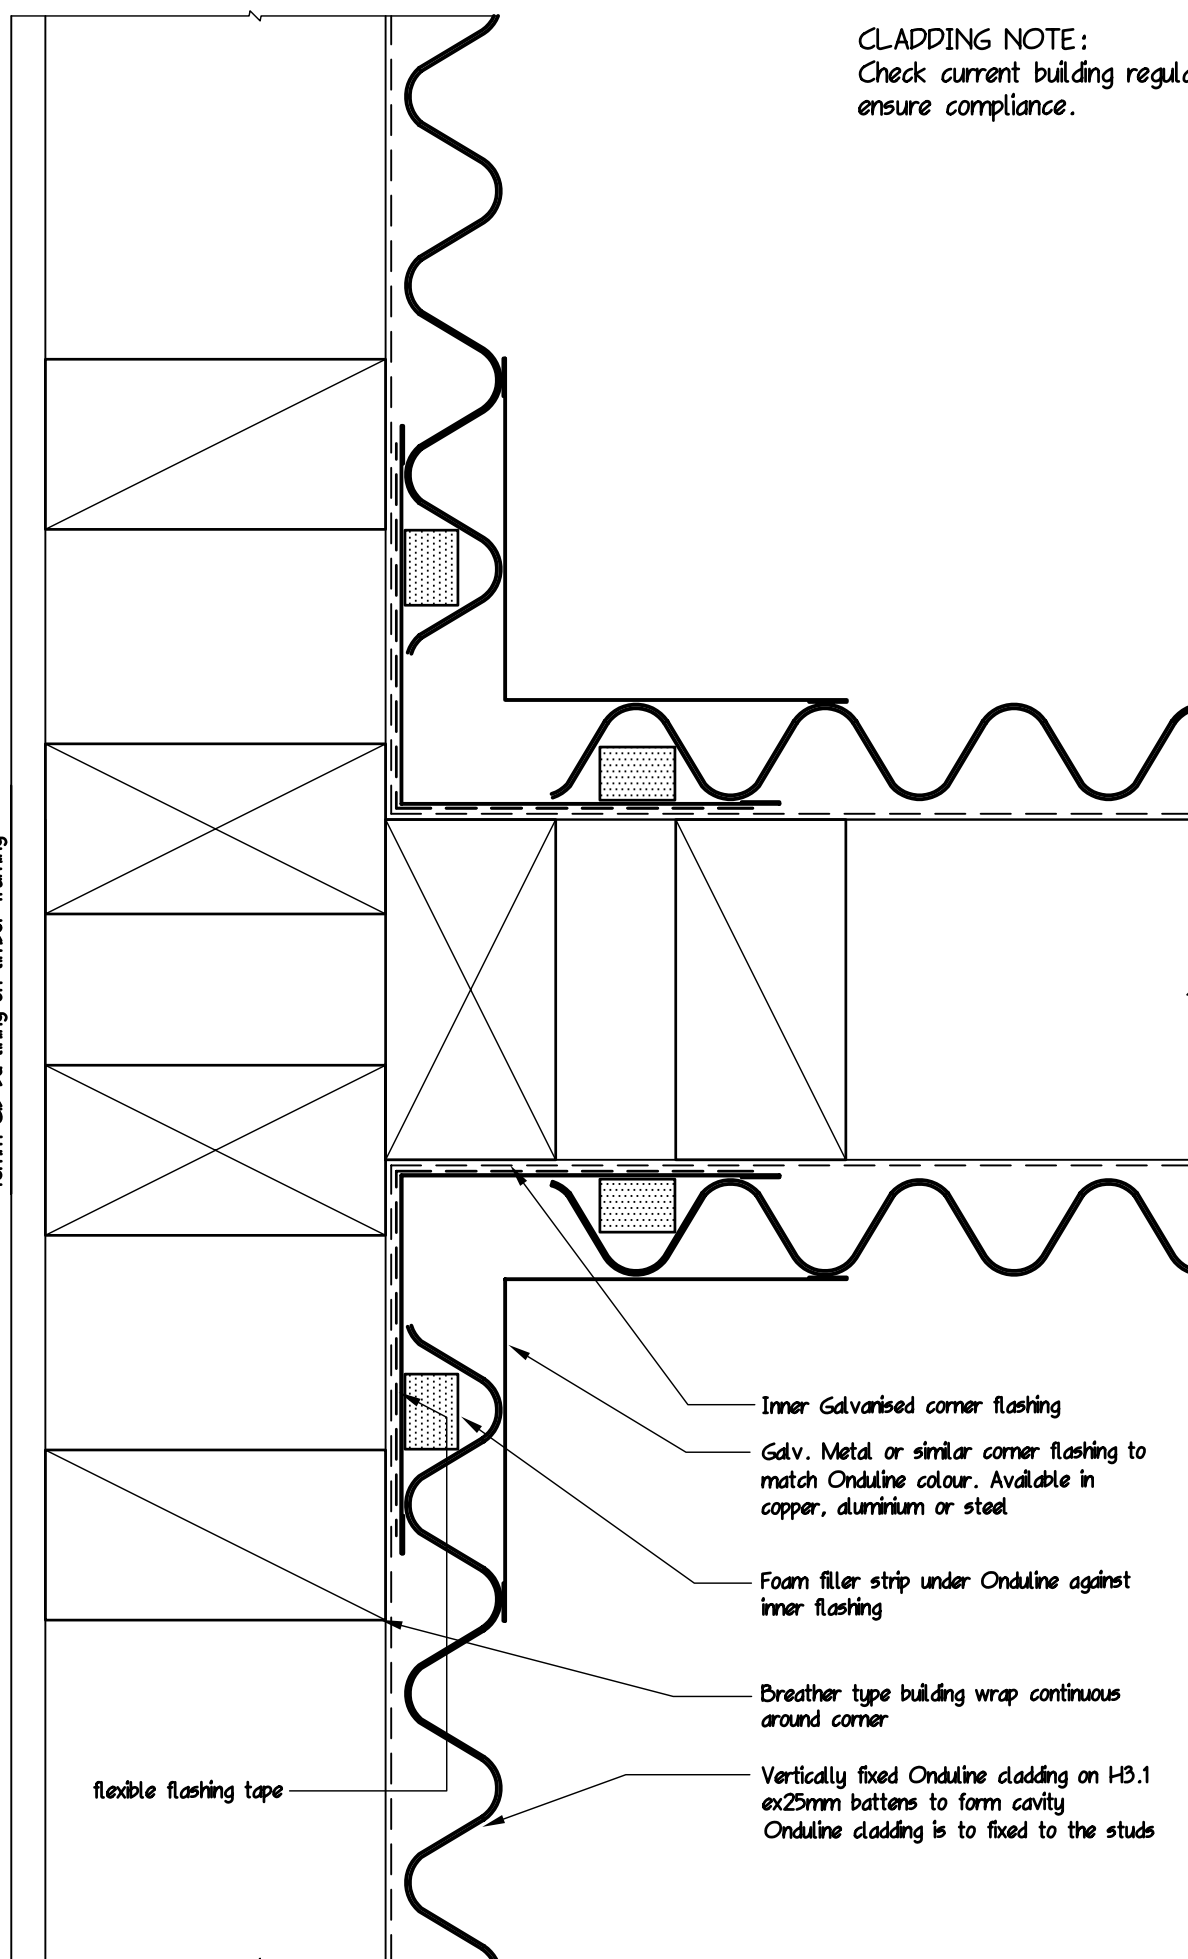


- Inner Galvanised corner flashing
- Galv. Metal or similar corner flashing to match Onduline colour. Available in copper, aluminium or steel
- Foam filler strip under Onduline against inner flashing
- Breather type building wrap continuous around corner
- Vertically fixed Onduline cladding on H3.1 ex25mm battens to form cavity
Onduline cladding is to fixed to the studs


flexible flashing tape

10mm Gb bd lining on timber framing

CLADDING NOTE:
Check current building regulations to ensure compliance.

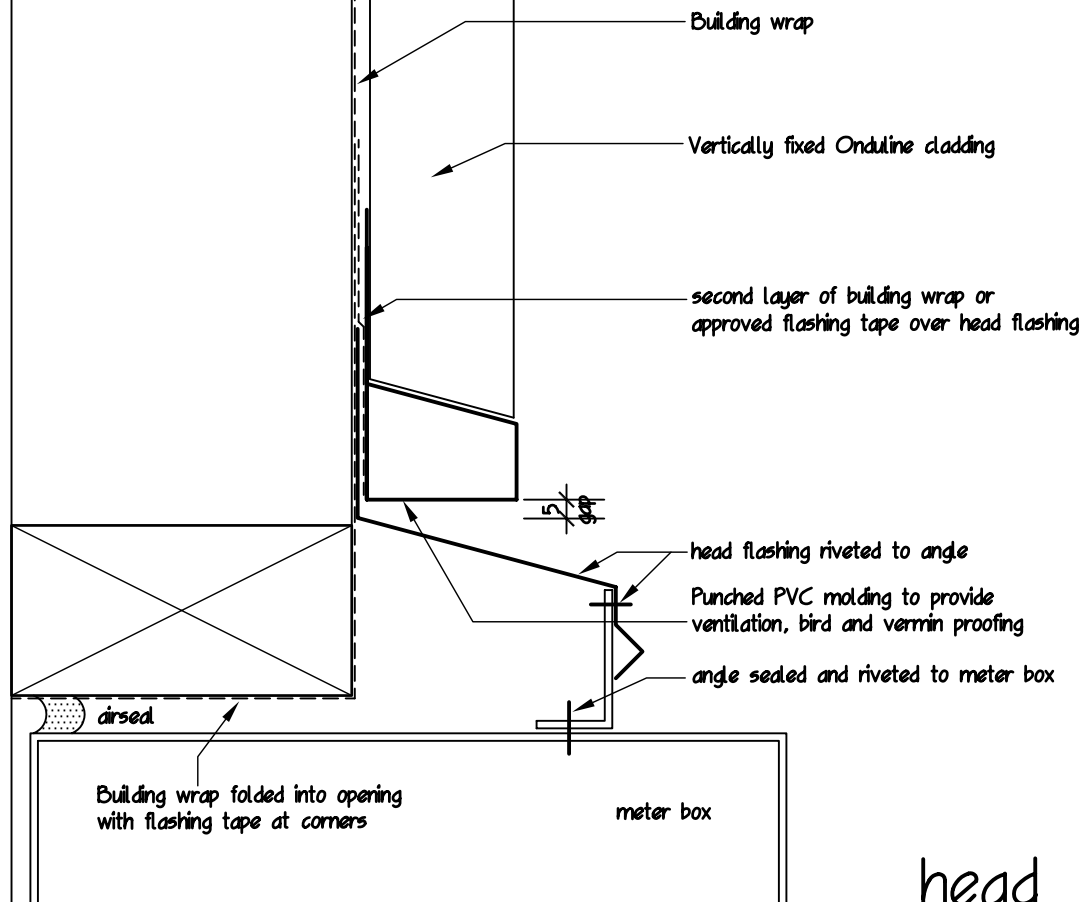

head

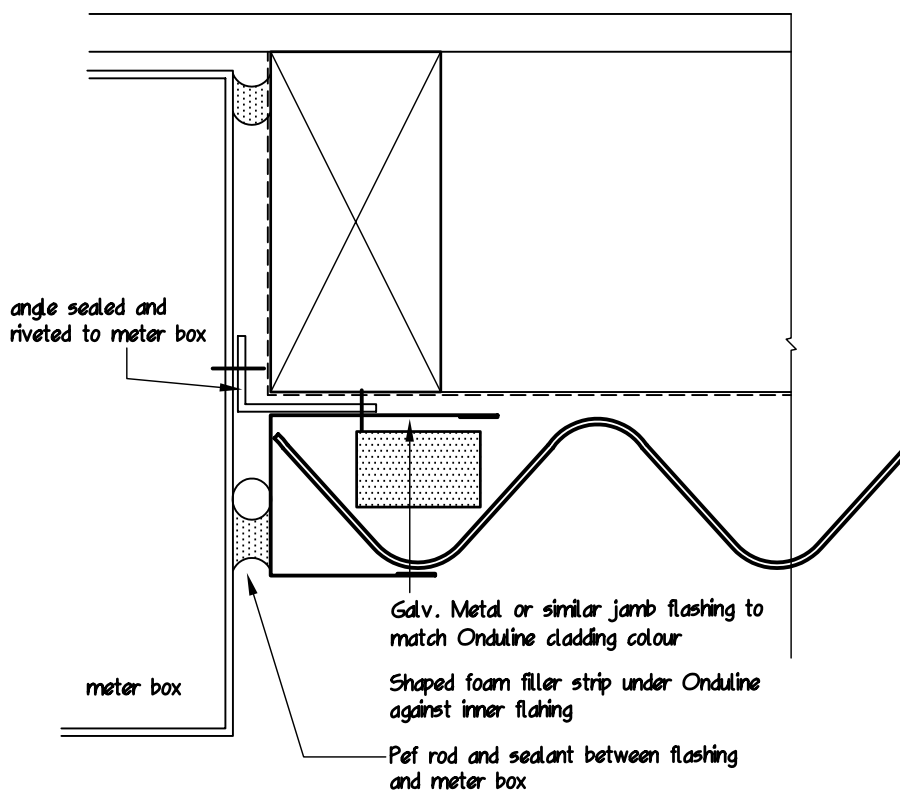



jamb and sill

meter box detail
scale 1:5

Onduline

10mm Gb bd lining on timber framing

CLADDING NOTE:
Check current building regulations to ensure compliance.

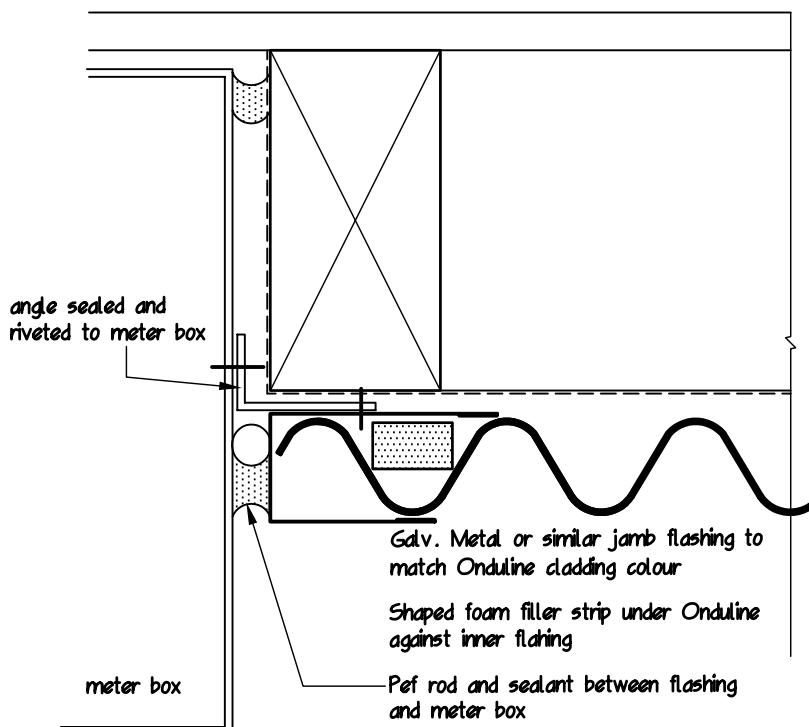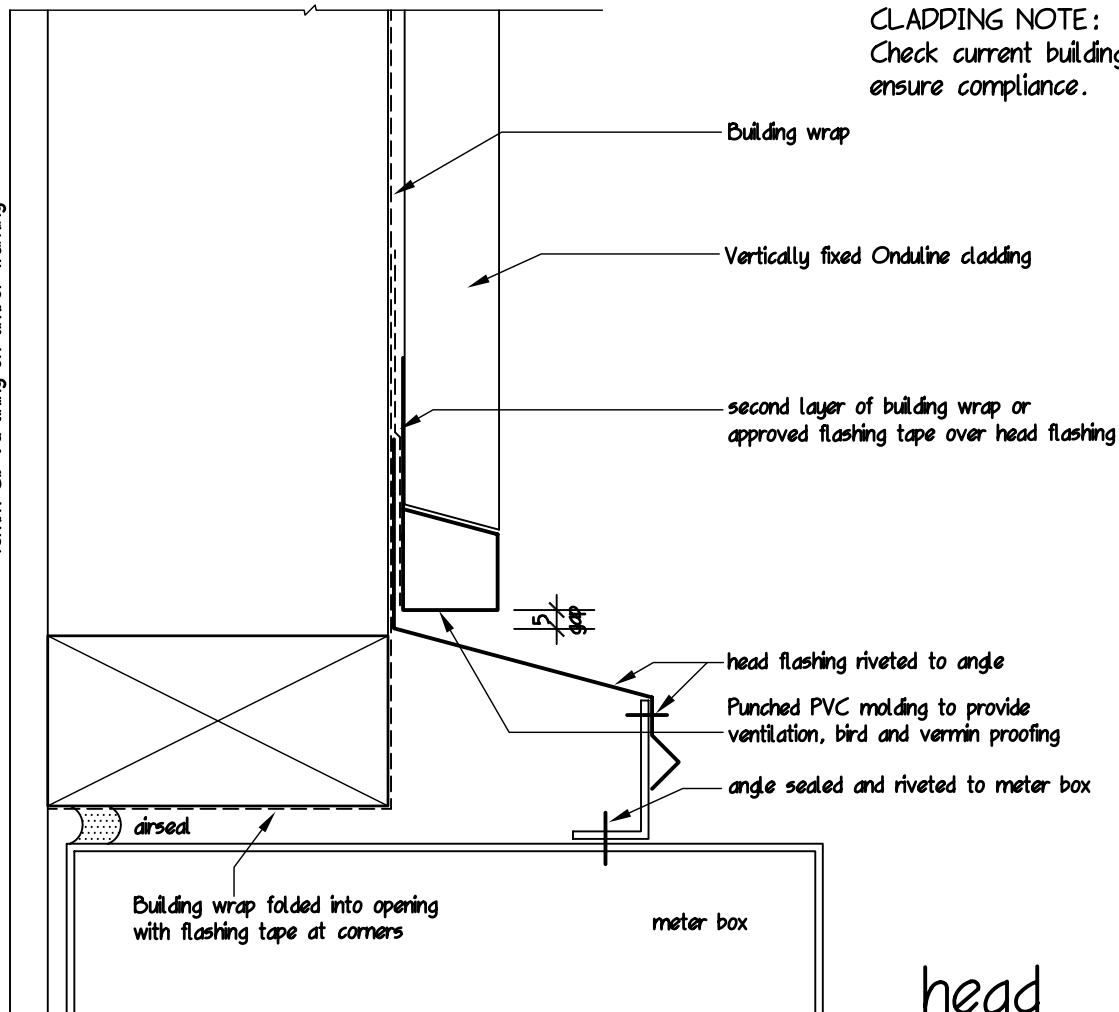

jamb and sill

meter box detail
scale 1:5